

東芝照明器具配光データシート


名 称	LEDシーリングライト
形 名	LEDH8406B01-LC

効 率	F 	25 %
	F 	75 %
	F 	100 %
	器具 光束	4500 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー
反射面	塗装 (白)

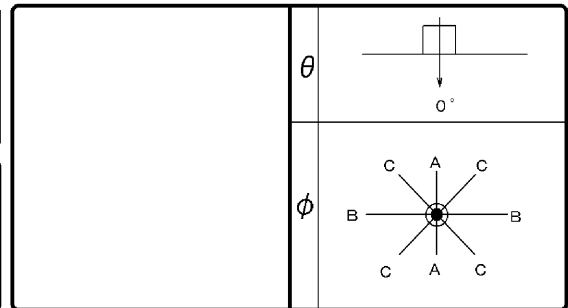

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30		20	0				
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50		30		30		10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
						固 有 照 明 率 (×0.01)																									
0°	225	225	225	室指数																											
10°	221	221	221	0.60	56	52	42	40	34	33	53	49	40	39	33	32	37	36	30	29	28	27	23	20							
20°	210	210	211	0.80	67	61	53	50	44	42	63	58	51	48	42	40	46	44	39	38	36	35	30	27							
30°	190	191	192	1.00	74	67	60	56	50	48	70	63	57	53	48	46	52	49	44	43	41	40	34	31							
40°	164	167	166	1.25	81	72	68	62	58	54	76	69	64	59	55	52	58	55	51	49	46	45	40	35							
50°	136	140	138	1.50	86	76	73	66	64	59	81	72	69	64	61	57	62	58	55	53	51	49	43	39							
60°	111	114	111	2.00	94	82	83	74	73	67	88	78	78	71	70	65	70	65	64	60	58	55	50	45							
70°	88	90	86	2.50	99	85	88	78	80	72	93	81	84	75	76	69	74	69	69	64	62	59	54	49							
80°	65	65	63	3.00	103	88	93	82	85	76	96	84	88	78	81	73	78	72	73	68	65	63	57	52							
90°	46	46	46	4.00	107	91	99	86	93	81	100	87	94	83	88	78	83	76	78	72	70	67	62	56							
100°	44	44	46	5.00	110	93	103	89	97	85	103	89	97	85	92	82	86	78	82	75	73	70	65	59							
110°	42	42	45	10.00	117	97	113	95	109	92	109	94	106	91	102	89	93	84	91	82	80	76	72	65							
120°	39	40	43																												
130°	36	37	40																												
140°	33	33	36																												
150°	29	29	31																												
160°	25	25	27																												
170°	25	25	24																												
180°	23	23	20																												

