


東芝照明器具配光データシート

名 称	LEDシーリングライト
形 名	LEDH8606B01-LC

効 率	F 	25 %
	F 	75 %
	F 	100 %
器具光束		5600 lm

保守率	良	0.63
	中	0.60
	否	0.56

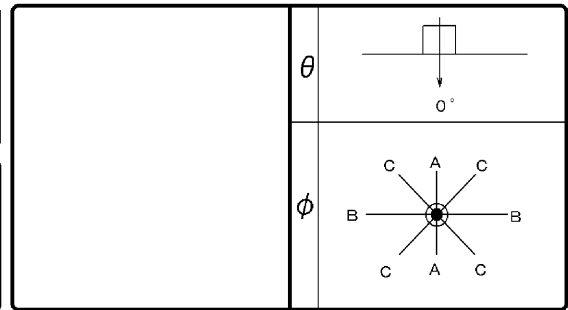

前 面	カバー
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0												
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0						
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
0°		225	225	225	室指数																								固 有 照 明 率 (×0.01)											
10°		221	221	221	0.60	56	52	42	40	34	33	53	49	40	39	33	32	37	36	30	29	28	27	23	20															
20°		210	210	211	0.80	67	61	53	50	44	42	63	58	51	48	42	40	46	44	39	38	36	35	30	27															
30°		190	191	192	1.00	74	67	60	56	50	48	70	63	57	53	48	46	52	49	44	43	41	40	34	31															
40°		164	167	166	1.25	81	72	68	62	58	54	76	69	64	59	55	52	58	55	51	49	46	45	40	35															
50°		136	140	138	1.50	86	76	73	66	64	59	81	72	69	64	61	57	62	58	55	53	51	49	43	39															
60°		111	114	111	2.00	94	82	83	74	73	67	88	78	78	71	70	65	70	65	64	60	58	55	50	45															
70°		88	90	86	2.50	99	85	88	78	80	72	93	81	84	75	76	69	74	69	69	64	62	59	54	49															
80°		65	65	63	3.00	103	88	93	82	85	76	96	84	88	78	81	73	78	72	73	68	65	63	57	52															
90°		46	46	46	4.00	107	91	99	86	93	81	100	87	94	83	88	78	83	76	78	72	70	67	62	56															
100°		44	44	46	5.00	110	93	103	89	97	85	103	89	97	85	92	82	86	78	82	75	73	70	65	59															
110°		42	42	45	10.00	117	97	113	95	109	92	109	94	106	91	102	89	93	84	91	82	80	76	72	65															
120°		39	40	43																																				
130°		36	37	40																																				
140°		33	33	36																																				
150°		29	29	31																																				
160°		25	25	27																																				
170°		25	25	24																																				
180°		23	23	20																																				

