

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEET41201DD9LEEM40693D0 1

効 率	F 	6 %
	F 	94 %
	F 	100 %
	器具 光束	6800 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

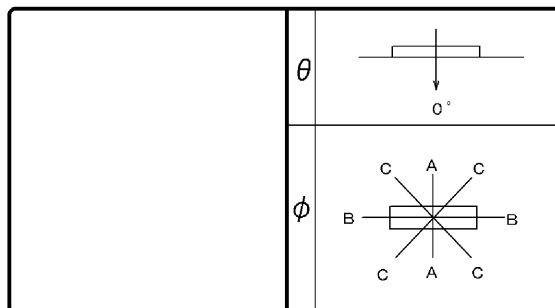

備考

光度 (cd/1000lm)				反 射 率 (%)	天井		80						70						50						30		20	0
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70						50						30						10	0			
						70		50		30		70		50		30		50		30		30	10	0				
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
				室指数	固 有 照 明 率 (×0.01)																							
0°				0.60	60	55	46	43	37	36	58	54	44	42	36	35	43	41	35	34	34	33	29	27				
10°				0.80	72	65	57	54	48	46	69	63	56	53	47	45	53	51	45	44	44	43	38	36				
20°				1.00	79	71	64	60	55	52	76	69	63	59	54	51	59	56	52	50	50	49	44	41				
30°				1.25	86	77	73	67	63	59	83	75	71	65	61	58	67	63	59	56	57	55	50	47				
40°				1.50	91	81	78	71	69	64	88	78	76	70	67	63	72	67	64	61	61	59	55	52				
50°				2.00	100	87	88	79	79	72	96	85	85	77	77	71	80	74	73	69	70	67	62	60				
60°				2.50	105	90	94	83	86	77	100	88	91	82	83	76	85	79	79	74	75	72	67	64				
70°				3.00	108	93	99	87	91	81	104	91	95	85	88	80	89	82	83	78	79	75	71	68				
80°				4.00	113	96	105	91	99	87	108	94	101	89	95	85	94	86	89	83	84	80	76	73				
90°				5.00	116	98	109	94	103	90	111	96	105	92	100	89	97	89	93	86	87	83	80	77				
100°				10.00	122	102	118	100	115	98	117	100	114	98	110	96	105	95	102	93	95	90	87	84				
110°																												
120°																												
130°																												
140°																												
150°																												
160°																												
170°																												
180°																												

