

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKR741851FWW-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		7500 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

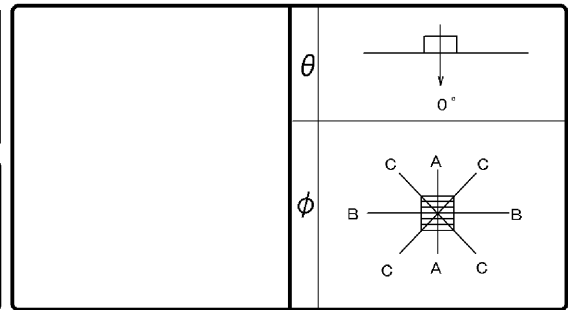

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0						
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
0°		350	349	350	室指数	固 有 照 明 率 (×0.01)																												
10°		343	343	343		0.60	63	58	48	46	40	38	61	56	48	45	39	38	46	44	39	38	38	37	33	31								
20°		325	324	325		0.80	75	68	61	57	51	49	73	67	60	56	51	49	57	55	50	48	49	48	43	41								
30°		295	294	294		1.00	82	74	68	63	59	56	79	72	67	62	58	55	64	61	57	54	55	54	49	47								
40°		255	254	255		1.25	90	80	77	70	67	63	87	78	75	69	66	62	72	67	64	61	62	61	56	54								
50°		207	206	207		1.50	95	84	82	75	73	68	92	82	80	74	72	67	77	72	70	66	67	65	61	59								
60°		153	152	153		2.00	103	90	92	83	84	77	100	88	90	82	82	76	86	79	79	75	76	73	69	67								
70°		97	96	97		2.50	108	93	98	87	91	82	104	92	96	86	89	81	91	84	85	79	81	78	74	72								
80°		43	42	42		3.00	112	96	103	90	96	86	108	94	100	89	94	85	95	87	89	83	85	82	78	76								
90°		0	0	0		4.00	116	99	109	95	103	91	112	97	106	93	101	90	100	91	95	88	91	87	84	82								
100°		0	0	0		5.00	119	101	113	97	108	94	115	99	110	96	105	93	103	94	99	91	94	90	87	85								
110°		0	0	0		10.00	125	104	122	103	119	101	120	103	117	101	115	100	110	99	108	98	102	96	94	92								
120°		0	0	0																														
130°		0	0	0																														
140°		0	0	0																														
150°		0	0	0																														
160°		0	0	0																														
170°		0	0	0																														
180°		0	0	0																														

