

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKR741851FL-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		7400 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	カバー（乳白）
反射面	塗装（白）

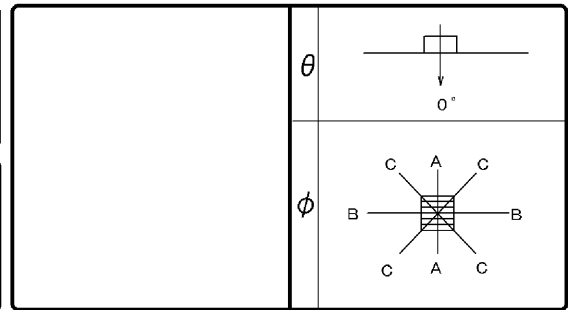

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0						
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
						固 有 照 明 率 (×0.01)																												
0°	349	349	349	室指数	0.60	63	58	48	46	40	38	61	56	48	45	39	38	46	44	39	38	38	37	33	31									
10°	343	343	343		0.80	75	68	61	57	51	49	73	67	60	56	51	49	57	55	50	48	49	48	43	41									
20°	324	324	324		1.00	82	74	68	63	59	56	79	72	67	62	58	55	64	61	57	54	55	54	49	47									
30°	294	295	294		1.25	90	80	77	70	67	63	87	78	75	69	66	62	72	67	64	61	62	61	56	54									
40°	255	255	255		1.50	95	84	82	75	73	68	92	82	80	74	72	67	77	72	70	66	68	65	61	59									
50°	207	207	207		2.00	103	90	92	83	84	77	100	88	90	82	82	76	86	79	79	75	76	73	69	67									
60°	152	154	153		2.50	108	93	98	87	91	82	104	92	96	86	89	81	91	84	85	79	81	78	74	72									
70°	96	97	97		3.00	112	96	103	90	96	86	108	94	100	89	94	85	95	87	89	83	85	82	78	76									
80°	42	43	42		4.00	116	99	109	95	103	91	112	97	106	93	101	90	100	91	95	88	91	87	84	82									
90°	0	0	0		5.00	119	101	113	97	108	94	115	99	110	96	105	93	103	94	99	91	94	90	87	85									
100°	0	0	0		10.00	125	104	122	103	119	101	120	103	118	101	115	100	110	99	108	98	102	96	94	92									
110°	0	0	0																															
120°	0	0	0																															
130°	0	0	0																															
140°	0	0	0																															
150°	0	0	0																															
160°	0	0	0																															
170°	0	0	0																															
180°	0	0	0																															

