

東芝照明器具配光データシート

名 称 LED照明器具

形 名 LEER73531+LEEM-G-71201L-LD9

効	F	0 %
率	F	99 %
	F	99 %
器具光束		8580 lm

保守率	良	0.81
	中	0.77
	否	0.68


最大取付間隔

A-A	1.3 H
B-B	1.3 H


前 面 カバー（プリズム）

反射面 白

θ



ϕ




備考

光度 (cd/1000lm)

$\theta \backslash \phi$	A-A	B-B	C-C
0°	418	418	418
10°	411	412	412
20°	389	390	390
30°	355	355	356
40°	303	301	304
50°	198	197	205
60°	114	114	117
70°	48	50	52
80°	15	16	20
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		67	61	53	51	45	44	65	60	53	50	45	44	51	49	44	43	44	43	39	37			
0.80		79	72	66	62	58	56	77	71	65	62	58	55	63	60	56	55	55	54	50	48			
1.00		86	78	74	68	65	62	84	76	73	68	65	62	70	66	63	61	62	60	56	54			
1.25		94	83	82	75	74	69	91	82	80	74	73	69	77	73	71	68	69	67	63	61			
1.50		99	87	88	79	79	74	96	85	86	79	78	73	82	77	76	72	74	71	67	66			
2.00		106	92	97	86	89	82	103	91	94	86	88	81	90	84	84	80	82	79	75	73			
2.50		110	95	102	90	95	86	107	94	99	89	93	85	94	87	89	84	86	83	79	78			
3.00		114	97	106	93	100	89	110	96	103	92	98	88	98	90	93	87	89	86	83	81			
4.00		118	100	112	97	106	94	113	99	108	96	104	93	102	93	99	91	94	89	87	85			
5.00		120	101	115	99	110	96	116	100	111	98	107	95	105	95	102	93	97	92	89	88			
10.00		125	104	122	103	119	101	120	103	118	102	116	100	110	100	108	98	102	97	95	93			

配光曲線 (cd/1000lm)

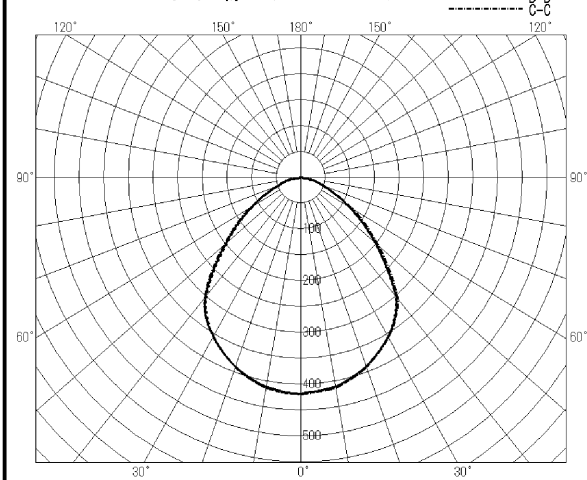

[高さ(m)] [単位 lx] 初期値

