

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEER-41602-LD9+LEEM-405 23N-VB

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	3730 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	
反射面	塗装 (白)

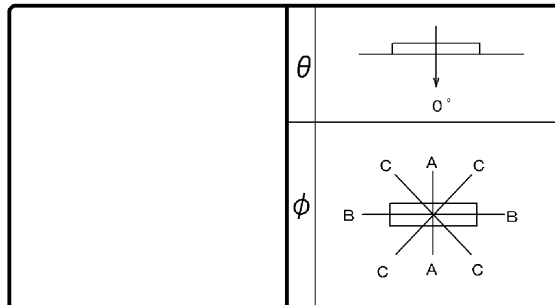

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
						固有照明率 (×0.01)																						
0°	395	395	395	室指数	0.60																							
10°	388	388	388		0.80																							
20°	370	367	368		1.00																							
30°	342	332	336		1.25																							
40°	285	287	293		1.50																							
50°	181	234	228		2.00																							
60°	59	174	129		2.50																							
70°	42	108	42		3.00																							
80°	23	41	24		4.00																							
90°	0	0	0		5.00																							
100°	0	0	0		10.00																							
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

