

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEER-21902N-XD9+LEEM-20163N-01

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	1510 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

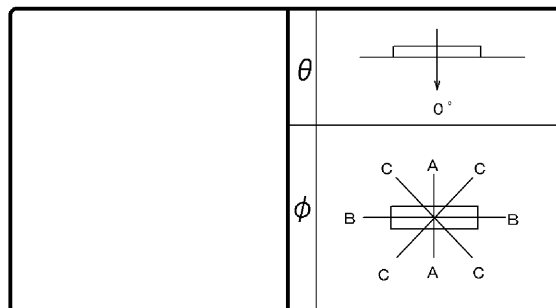

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
0°	340	340	340	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
10°	335	334	335																									
20°	322	315	319																									
30°	299	285	295																									
40°	264	245	259																									
50°	220	198	213																									
60°	171	146	162																									
70°	108	89	107																									
80°	15	33	35																									
90°	0	0	0																									
100°	0	0	0																									
110°	0	0	0																									
120°	0	0	0																									
130°	0	0	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	0	0	0																									
180°	0	0	0																									

