


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEKD10011MW-LS9

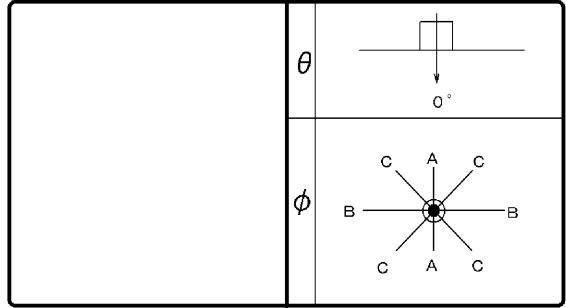

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	1045 lm

保守 率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	白色

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	714		
10°	657		
20°	601		
30°	523		
40°	334		
50°	78		
60°	27		
70°	11		
80°	5		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		0		30		10		0		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数		固有照明率 (×0.01)																																			
0.60		80	73	69	65	62	60	78	72	68	65	62	60	67	64	61	59	60	59	56	55																
0.80		92	84	82	77	75	72	90	83	81	76	75	72	79	75	73	71	72	71	68	67																
1.00		97	88	88	81	81	77	95	87	86	81	80	76	84	79	79	76	77	75	72	71																
1.25		103	92	94	86	87	82	101	91	92	85	86	81	89	84	84	81	82	80	77	76																
1.50		107	94	98	89	92	85	104	93	96	89	91	85	93	87	88	84	86	83	81	79																
2.00		113	98	105	94	100	91	110	97	103	93	98	90	99	92	95	89	92	88	86	84																
2.50		116	100	109	97	104	94	112	99	107	96	102	93	102	94	98	92	94	91	88	87																
3.00		118	101	112	98	108	96	115	100	109	98	105	95	104	96	101	94	97	92	90	89																
4.00		121	103	116	101	112	99	117	102	113	100	109	98	107	98	104	96	99	95	93	91																
5.00		123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	94	93																
10.00		127	106	124	105	122	104	122	105	120	104	118	103	112	102	111	101	105	99	97	96																

