

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEET-42904W+LEEM-40524N -WP-LS9

効 率	F 	9 %
	F 	91 %
	F 	100 %
	器具 光束	4610 lm

保 守 率	良	0.88
	中	0.86
	否	0.72

最大取付間隔	
A-A	1.1 H
B-B	1.2 H

前 面	カバー (透明)
反射面	

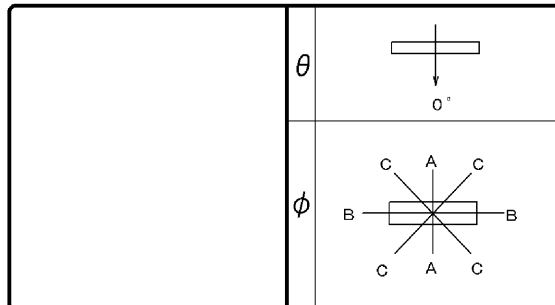

備 考	LEET-42904W+LEEM-40524N-WP-LS9
--------	--------------------------------

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	305	305	305
10°	284	299	292
20°	239	278	253
30°	222	240	214
40°	212	184	194
50°	199	112	174
60°	182	60	148
70°	156	36	112
80°	133	14	82
90°	107	3	60
100°	58	4	49
110°	20	3	7
120°	7	2	6
130°	6	0	4
140°	4	0	2
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固 有 照 明 率 (×0.01)																					
0.60		59	54	44	42	35	34	56	52	43	41	35	34	41	39	33	32	32	31	27	25		
0.80		70	63	55	52	46	44	67	61	53	50	45	43	50	48	43	41	41	40	35	32		
1.00		77	69	62	58	52	50	73	67	60	56	51	49	56	54	49	47	46	45	40	37		
1.25		84	75	70	64	60	56	80	72	68	63	58	55	63	60	55	53	53	51	46	43		
1.50		89	78	76	69	66	61	85	76	73	67	64	60	68	64	60	58	57	55	50	47		
2.00		97	85	85	76	76	69	93	82	82	74	73	68	76	71	69	65	65	63	58	54		
2.50		102	88	91	81	82	74	97	85	88	79	80	73	81	75	74	70	70	67	62	59		
3.00		106	91	96	84	88	78	101	88	92	82	85	77	85	78	79	73	74	71	66	62		
4.00		111	94	102	89	95	84	105	91	98	86	92	82	90	82	85	79	79	75	71	67		
5.00		114	96	106	91	100	87	108	93	102	89	96	85	93	85	89	82	83	78	74	71		
10.00		120	101	116	98	112	95	114	98	111	96	107	93	101	91	98	89	91	86	82	79		

