

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEET-42904W+LEEM-40524L-WP-LS9

効 率	F 	9 %
	F 	91 %
	F 	100 %
	器具 光束	4270 lm

保 守 率	良	0.88
	中	0.86
	否	0.72

最大取付間隔	
A-A	1.1 H
B-B	1.2 H

前 面	カバー (透明)
反射面	

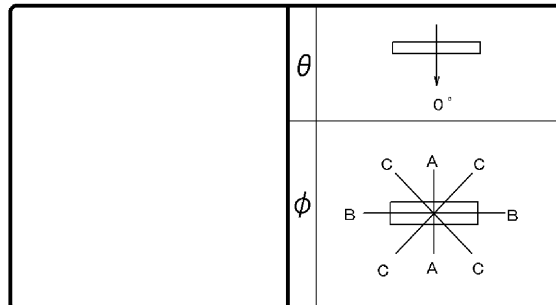

備 考	LEET-42904W+LEEM-40524L-WP-LS9
--------	--------------------------------

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30			20	0						
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70			50			30			50			30			30			10	0
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
0°	305	305	305		固有照明率 (×0.01)																													
10°	284	299	292	室指数																														
20°	239	278	253	0.60	59	54	44	42	35	34	56	52	43	41	35	34	41	39	33	32	32	31	27	25										
30°	222	240	214	0.80	70	63	55	52	46	44	67	61	53	50	45	43	50	48	43	41	41	40	35	32										
40°	212	184	194	1.00	77	69	62	58	52	50	73	67	60	56	51	49	56	54	49	47	46	45	40	37										
50°	199	112	174	1.25	84	75	70	64	60	56	80	72	68	63	58	55	63	60	55	53	53	51	46	43										
60°	182	60	148	1.50	89	78	76	69	66	61	85	76	73	67	64	60	68	64	60	58	57	55	50	47										
70°	156	36	112	2.00	97	85	85	76	76	69	93	82	82	74	73	68	76	71	69	65	65	63	58	54										
80°	133	14	82	2.50	102	88	91	81	82	74	97	85	88	79	80	73	81	75	74	70	70	67	62	59										
90°	107	3	60	3.00	106	91	96	84	88	78	101	88	92	82	85	77	85	78	79	73	74	71	66	62										
100°	58	4	49	4.00	111	94	102	89	95	84	105	91	98	86	92	82	90	82	85	79	79	75	71	67										
110°	20	3	7	5.00	114	96	106	91	100	87	108	93	102	89	96	85	93	85	89	82	83	78	74	71										
120°	7	2	6	10.00	120	101	116	98	112	95	114	98	111	96	107	93	101	91	98	89	91	86	82	79										
130°	6	0	4																															
140°	4	0	2																															
150°	0	0	0																															
160°	0	0	0																															
170°	0	0	0																															
180°	0	0	0																															

