

東芝照明器具配光データシート


名 称	LED高天井用照明器具
形 名	LEDJ-31902N-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束	34400 lm	

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

前 面	カバー（透明）
反射面	白色

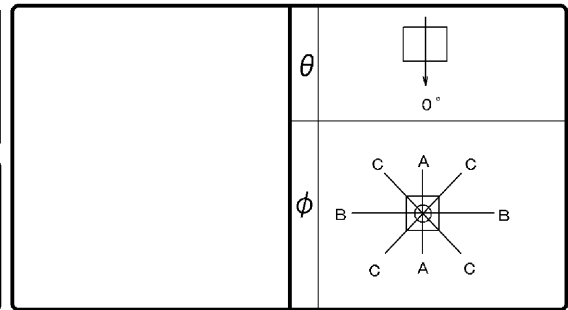

備考	暫定配光図
----	-------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	499		
10°	502		
20°	454		
30°	373		
40°	327		
50°	207		
60°	74		
70°	33		
80°	8		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		71	65	58	55	50	49	69	64	57	55	50	49	56	54	49	48	49	48	44	42		
0.80		84	76	71	67	63	61	82	75	70	66	63	61	68	65	62	60	61	59	56	54		
1.00		90	81	79	73	71	67	88	80	77	72	70	67	75	71	68	66	67	65	61	60		
1.25		97	87	86	79	78	74	95	85	85	78	77	73	82	77	75	72	74	71	68	66		
1.50		102	90	92	83	84	78	99	89	90	82	83	78	86	81	80	77	78	76	72	71		
2.00		109	95	100	90	94	85	106	94	98	89	92	85	94	87	89	84	86	82	79	78		
2.50		113	98	105	93	99	89	109	96	103	92	97	89	98	90	93	87	90	86	83	81		
3.00		116	99	109	96	103	92	112	98	106	95	101	91	101	93	97	90	93	89	86	84		
4.00		120	102	114	99	109	96	116	100	111	98	106	95	105	96	101	94	97	92	90	88		
5.00		122	103	117	101	113	98	118	102	113	99	110	97	107	97	104	96	99	94	92	90		
10.00		126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	96	94		

