

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEER-41502-LS9+LEEM-C40 523N-3W

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		4900 lm

保守率	良	0.86
	中	0.81
	否	0.72

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

前 面	カバー (乳白)
反射面	塗装 (白)

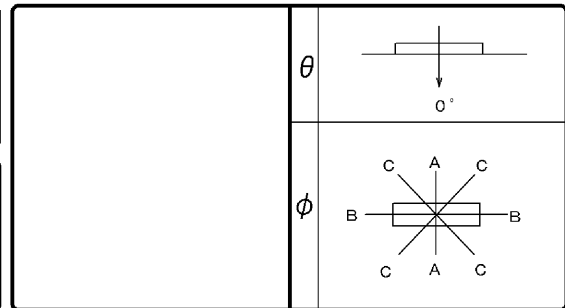

備考	ViewLED：広角/有線/SD別売タイプ
----	-----------------------

光度 (cd/1000lm)				反射率 (%)	天井 壁 床	80						70						50						30			20			0								
θ \ φ	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10			0		
0°	338	338	338			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30		
10°	332	332	332			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30		
20°	317	312	315	室指数																																		
30°	293	282	287	固有照明率 (×0.01)																																		
40°	261	243	251	0.60	62	57	48	45	39	38	60	56	47	45	39	37	45	44	38	37	37	37	32	30														
50°	222	198	208	0.80	74	67	60	56	51	48	72	66	59	55	50	48	57	54	49	47	48	47	42	40														
60°	173	147	162	1.00	82	73	67	63	58	55	79	72	66	62	57	55	63	60	56	54	54	53	48	46														
70°	110	91	107	1.25	89	79	76	70	66	62	86	78	74	69	65	62	71	67	64	61	62	60	55	53														
80°	31	33	41	1.50	94	83	82	74	73	67	91	82	80	73	71	67	76	71	69	66	67	65	60	58														
90°	1	1	1	2.00	103	90	92	82	83	76	99	88	90	81	82	76	85	79	79	74	76	73	69	67														
100°	0	0	0	2.50	108	93	98	87	90	81	104	91	95	86	88	81	90	83	84	79	81	78	74	72														
110°	0	0	0	3.00	111	96	103	90	96	85	107	94	100	89	93	85	94	87	89	83	85	81	78	76														
120°	0	0	0	4.00	116	99	109	94	103	91	112	97	106	93	100	90	100	91	95	88	91	86	83	81														
130°	0	0	0	5.00	119	101	113	97	108	94	115	99	109	96	105	93	103	94	99	91	94	89	87	85														
140°	0	0	0	10.00	125	104	122	103	119	101	120	103	117	101	115	100	110	99	108	98	101	96	94	92														
150°	0	0	0																																			
160°	0	0	0																																			
170°	0	0	0																																			
180°	0	0	0																																			

