

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKD103024N-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1060 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	下面開放
反射面	白色

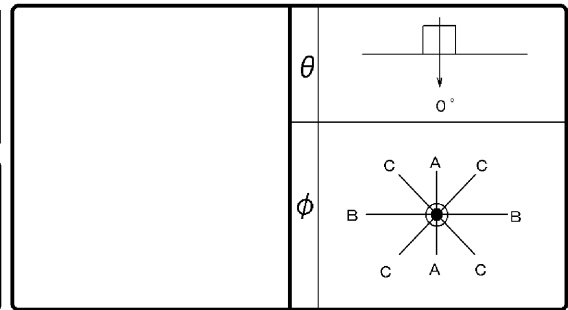

備考	LEKD103024N-LS9
----	-----------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	441		
10°	435		
20°	414		
30°	377		
40°	311		
50°	217		
60°	103		
70°	30		
80°	13		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	固有照明率 (×0.01)																					
0.60	69	63	55	53	48	46	67	62	55	52	47	46	53	51	46	45	46	45	41	39		
0.80	82	74	69	65	61	58	79	73	68	64	60	58	66	63	59	57	58	57	53	51		
1.00	88	79	76	71	68	64	86	78	75	70	67	64	72	69	66	63	64	63	59	57		
1.25	96	85	84	77	76	71	93	84	83	77	75	71	80	75	73	70	71	69	65	64		
1.50	101	89	90	82	82	76	98	87	88	81	81	76	84	79	78	75	76	74	70	68		
2.00	108	94	99	88	92	84	105	93	97	88	90	83	92	86	87	82	84	81	78	76		
2.50	112	97	104	92	98	88	109	95	101	91	96	87	96	89	92	86	88	85	82	80		
3.00	115	99	108	95	102	91	111	97	105	94	100	90	100	92	95	89	91	88	85	83		
4.00	119	101	113	98	108	95	115	100	110	97	106	94	104	95	100	93	96	91	89	87		
5.00	121	103	116	100	112	98	117	101	113	99	109	97	106	97	103	95	98	93	91	89		
10.00	126	105	123	104	121	102	121	104	119	103	117	101	111	101	110	99	103	98	96	94		

