

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-18003MV-LS9 + LEEU-2506L-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1410 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

前 面	下面開放
反射面	銀色鏡面仕上げ

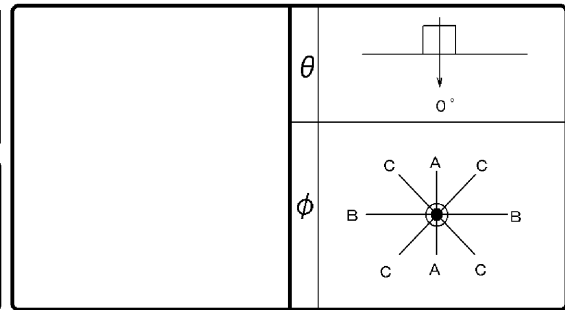

備考	LEDD-18003MV-LS9+LEEU-2506L-03
----	--------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	899		
10°	834		
20°	672		
30°	477		
40°	274		
50°	102		
60°	30		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		83	76	72	69	66	64	81	75	71	68	65	64	70	67	65	63	64	63	60	59		
0.80		95	86	85	80	79	75	93	85	84	79	78	75	82	78	77	75	76	74	72	70		
1.00		100	90	90	84	84	80	98	89	89	83	83	79	87	82	81	79	80	78	75	74		
1.25		105	93	96	88	90	84	103	92	94	87	89	84	91	86	87	83	85	82	80	78		
1.50		109	96	100	91	94	87	106	95	98	90	93	87	95	89	90	86	88	85	83	81		
2.00		114	99	107	96	101	93	111	98	105	95	100	92	100	93	96	91	93	90	87	86		
2.50		117	101	111	98	106	95	114	100	108	97	103	95	103	95	100	93	96	92	90	88		
3.00		119	102	114	100	109	97	116	101	111	99	107	96	105	97	102	95	98	94	92	90		
4.00		122	104	118	102	114	100	118	103	114	101	111	99	108	99	106	98	101	96	94	93		
5.00		124	105	120	103	117	102	120	104	116	102	113	101	110	100	108	99	102	97	96	94		
10.00		128	107	125	106	123	105	123	105	121	105	120	104	114	103	112	102	106	100	99	97		

