

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKD103025LV-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1000 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

前 面	下面開放
反射面	銀色鏡面仕上げ

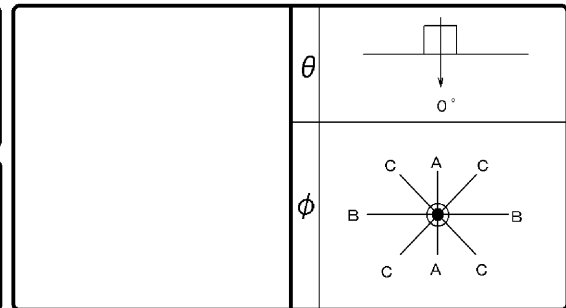

備考	LEKD103025LV-LS9
----	------------------

光度 (cd/1000lm)				反射率 (%)	天井	80						70						50				30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70			50			30			70		50		30		50		30		10	0		
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数					固有照明率 (×0.01)																							
0°					0.60	74	68	62	59	55	53	72	67	61	58	54	53	60	57	54	52	53	52	48	47			
10°					0.80	87	79	75	71	68	65	85	78	74	70	67	65	72	69	66	64	65	64	60	59			
20°					1.00	93	84	82	76	74	71	91	82	81	75	74	70	78	74	72	69	71	69	65	64			
30°					1.25	100	89	89	82	82	77	97	87	88	81	81	76	85	80	79	75	77	75	71	70			
40°					1.50	104	92	94	86	87	81	101	90	92	85	86	80	89	83	83	79	81	79	75	74			
50°					2.00	111	96	103	92	96	88	108	95	100	91	94	87	96	89	91	86	88	85	82	80			
60°					2.50	114	99	107	95	101	91	111	98	105	94	99	91	100	92	95	89	92	88	86	84			
70°					3.00	117	100	111	97	105	94	113	99	108	96	103	93	102	94	99	92	95	90	88	86			
80°					4.00	121	103	115	100	111	98	117	101	112	99	108	97	106	97	103	95	98	94	92	90			
90°					5.00	123	104	118	102	114	100	118	102	115	101	111	99	108	99	106	97	100	95	93	92			
100°					10.00	127	106	124	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	97	96			
110°																												
120°																												
130°																												
140°																												
150°																												
160°																												
170°																												
180°																												

