

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-18003MV-LS9 + LEEU-2505W-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1730 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

前 面	下面開放
反射面	銀色鏡面仕上げ

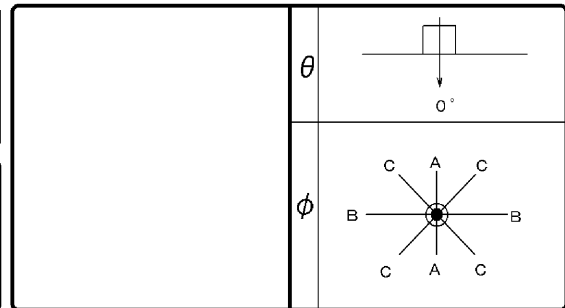

備考	LEDD-18003MV-LS9+LEEU-2505W-03
----	--------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1004		
10°	868		
20°	624		
30°	441		
40°	286		
50°	133		
60°	21		
70°	3		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		固有照明率 (×0.01)																						
0.60		82	75	71	68	65	63	80	74	70	67	64	62	69	66	64	62	63	62	59	58			
0.80		94	85	84	79	78	74	92	84	83	78	77	74	81	77	76	74	75	73	70	69			
1.00		99	89	89	83	83	79	97	88	88	82	82	78	86	81	81	78	79	77	74	73			
1.25		105	93	95	87	89	83	102	92	94	87	88	83	91	86	86	82	84	81	79	77			
1.50		108	95	100	91	93	87	105	94	98	90	92	86	94	88	90	85	87	85	82	81			
2.00		114	99	107	95	101	92	111	98	104	94	99	91	100	93	96	90	93	89	87	86			
2.50		117	101	110	98	105	95	113	100	108	97	103	94	103	95	99	93	96	92	90	88			
3.00		119	102	113	99	109	97	115	101	110	98	106	96	105	97	102	95	98	93	91	90			
4.00		122	104	117	102	113	100	118	103	114	101	111	99	108	99	105	97	101	96	94	92			
5.00		124	105	120	103	117	101	120	104	116	102	113	101	110	100	107	99	102	97	96	94			
10.00		128	107	125	106	123	105	123	105	121	105	119	104	114	103	112	102	106	100	99	97			

