

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-18904M-LS9 + LEEU-2506L-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1490 lm

保守率	良	0.77
	中	0.72
	否	0.68

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー（透明）
反射面	塗装（白）

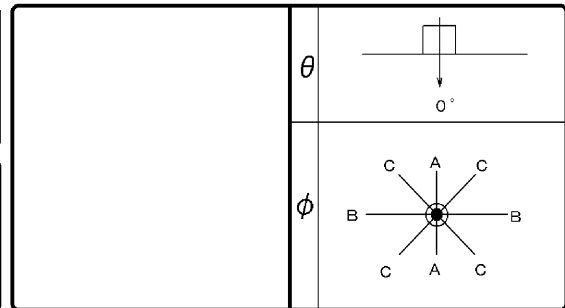

備考	LEDD-18904M-LS9+LEEU-2506L-03
----	-------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	579		
10°	584		
20°	560		
30°	474		
40°	245		
50°	115		
60°	79		
70°	43		
80°	17		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		75	69	64	60	56	55	74	68	63	60	56	54	61	59	55	54	55	54	50	49			
0.80		88	80	76	71	69	66	86	78	75	71	68	66	73	70	67	65	66	65	61	60			
1.00		93	84	82	76	75	71	91	83	81	76	74	70	78	74	72	70	71	69	66	64			
1.25		100	88	89	82	81	76	97	87	87	81	80	76	84	79	78	75	76	74	71	69			
1.50		104	91	94	85	86	80	101	90	92	84	85	80	88	83	83	79	80	78	75	73			
2.00		110	96	102	91	95	87	107	95	99	90	93	86	95	88	90	85	87	84	81	79			
2.50		114	98	106	94	100	90	110	97	103	93	98	89	98	91	94	88	90	87	84	82			
3.00		116	100	110	96	104	93	113	99	107	95	102	92	101	93	97	91	93	89	87	85			
4.00		120	102	115	99	110	96	116	101	111	98	107	96	105	96	102	94	97	92	90	88			
5.00		122	103	118	101	113	99	118	102	114	100	110	98	107	98	104	96	99	94	92	90			
10.00		127	106	124	105	122	103	122	105	120	103	118	102	112	101	111	100	104	99	97	95			

