

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-183003MV-LS9 + LEE U-2506L2-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	1320 lm

保守 率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

前 面	下面開放
反射面	銀色鏡面仕上げ

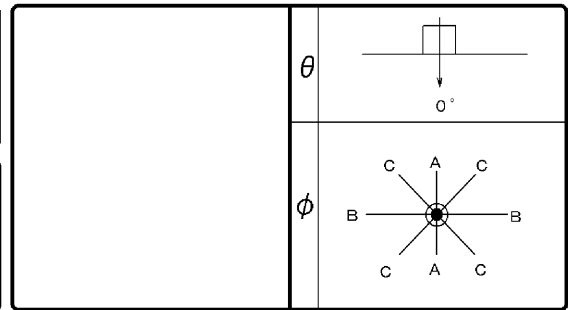

備考	LEDD-183003MV-LS9+LEEU-2506L2-03
----	----------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1213		
10°	1197		
20°	813		
30°	454		
40°	192		
50°	47		
60°	14		
70°	1		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		90	83	81	77	76	73	89	82	80	77	75	73	79	76	75	73	74	72	70	69		
0.80		101	92	93	87	88	84	99	91	92	87	87	84	90	86	86	83	85	83	81	80		
1.00		105	94	97	90	91	86	103	93	95	89	90	86	93	88	89	85	87	85	83	82		
1.25		109	96	101	92	95	89	106	96	99	92	94	89	96	91	92	88	90	87	85	84		
1.50		111	98	104	95	99	92	109	97	102	94	97	91	99	93	95	90	92	89	87	86		
2.00		116	101	109	98	104	95	113	100	107	97	102	95	103	96	99	94	96	92	91	89		
2.50		118	102	113	100	108	97	115	101	110	99	106	97	105	97	102	95	98	94	92	91		
3.00		120	103	115	101	111	99	117	102	112	100	108	98	107	98	104	97	100	95	94	92		
4.00		123	105	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	96	94		
5.00		125	105	121	104	118	103	121	104	118	103	115	102	111	101	109	100	104	99	97	96		
10.00		128	107	126	107	125	106	124	106	122	106	121	105	115	103	114	103	107	101	100	98		

