

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-18905M-LS9 + LEEU-1006N-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	840 lm

保守 率	良	0.77
	中	0.72
	否	0.68

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー（透明）
反射面	塗装（白）

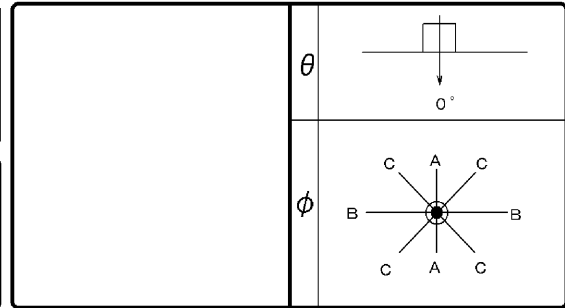

備考	LEDD-18905M-LS9+LEEU-1006N-03
----	-------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	451		
10°	445		
20°	418		
30°	375		
40°	312		
50°	220		
60°	107		
70°	27		
80°	9		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		69	63	56	53	48	46	67	62	55	52	47	46	54	51	47	46	46	45	41	40			
0.80		82	74	69	65	61	59	80	73	68	64	60	58	66	63	59	58	58	57	53	51			
1.00		89	80	77	71	68	65	86	79	75	70	68	65	73	69	66	64	65	63	59	57			
1.25		96	86	85	78	77	72	94	84	83	77	76	71	80	75	74	71	72	70	66	64			
1.50		101	89	90	82	83	77	98	88	88	81	81	76	85	80	79	75	77	74	71	69			
2.00		109	94	100	89	92	84	105	93	97	88	91	84	93	86	87	83	84	81	78	76			
2.50		113	97	105	93	98	89	109	96	102	92	96	88	97	90	92	86	89	85	82	80			
3.00		116	99	109	95	103	92	112	98	106	94	100	91	100	92	96	89	92	88	85	84			
4.00		119	102	114	98	109	96	115	100	110	97	106	95	104	95	101	93	96	92	89	87			
5.00		122	103	117	100	113	98	117	102	113	99	109	97	107	97	104	95	99	94	92	90			
10.00		126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	96	94			

