


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEDD-18903M-LS9 + LEEU-2506WW-03

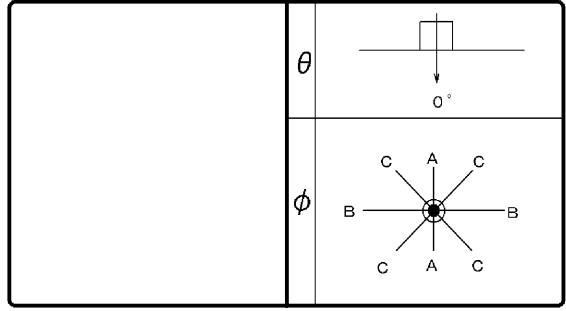

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	1430 lm

保守率	良	0.77
	中	0.72
	否	0.68

前面	カバー（透明）
反射面	塗装（白）

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	LEDD-18903M-LS9+LEEU-2506WW-03
----	--------------------------------

θ	ϕ	光度 (cd/1000lm)		
		A-A	B-B	C-C
0°		590		
10°		586		
20°		562		
30°		466		
40°		277		
50°		117		
60°		62		
70°		39		
80°		15		
90°		0		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		30		10		0		30		10		0																		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10																			
室指数	固有照明率 (×0.01)																																															
0.60	76	70	64	61	57	55	74	69	63	60	56	55	62	59	56	54	55	54	51	49																												
0.80	88	80	77	72	69	67	86	79	76	71	69	66	74	70	68	66	67	65	62	60																												
1.00	94	84	83	77	75	72	91	83	81	76	75	71	79	75	73	70	72	70	66	65																												
1.25	100	89	90	82	82	77	97	88	88	81	81	77	85	80	79	76	77	75	72	70																												
1.50	104	92	94	86	87	81	101	90	92	85	86	80	89	83	83	79	81	79	75	74																												
2.00	111	96	102	91	96	87	107	95	100	90	94	87	95	89	91	85	88	84	81	80																												
2.50	114	98	107	94	101	91	110	97	104	93	98	90	99	91	95	89	91	87	85	83																												
3.00	117	100	110	96	105	93	113	99	107	95	102	93	102	94	98	91	94	90	87	86																												
4.00	120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	93	91	89																												
5.00	122	103	118	101	114	99	118	102	114	100	110	98	107	98	105	96	100	95	93	91																												
10.00	127	106	124	105	122	103	122	105	120	103	118	102	112	101	111	100	104	98	97	95																												

