

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-18005MY-LD9 + LEEU-2506L-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1970 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	下面開放
反射面	白色

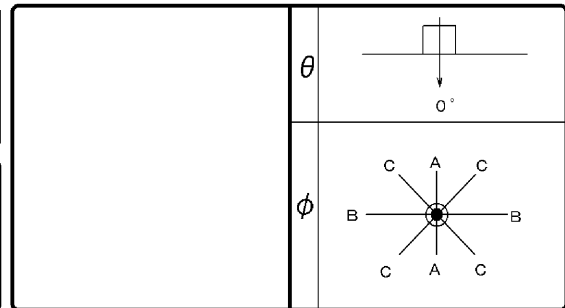

備考	LEDD-18005MY-LD9+LEEU-2506L-03
----	--------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	438		
10°	434		
20°	416		
30°	378		
40°	314		
50°	219		
60°	101		
70°	28		
80°	14		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	30	50	30	30	10	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	固有照明率 (×0.01)																					
0.60	69	63	56	53	48	46	67	62	55	52	47	46	53	51	47	46	46	45	41	40		
0.80	82	74	69	65	61	58	80	73	68	64	60	58	66	63	59	57	58	57	53	51		
1.00	89	80	76	71	68	65	86	78	75	70	67	64	73	69	66	64	65	63	59	57		
1.25	96	85	85	78	76	72	93	84	83	77	75	71	80	75	73	70	72	69	66	64		
1.50	101	89	90	82	82	76	98	87	88	81	81	76	85	79	79	75	76	74	70	69		
2.00	108	94	99	89	92	84	105	93	97	88	90	83	92	86	87	82	84	81	78	76		
2.50	112	97	104	92	98	88	109	96	102	91	96	88	97	89	92	86	88	85	82	80		
3.00	115	99	108	95	102	91	112	98	105	94	100	91	100	92	96	89	92	88	85	83		
4.00	119	101	114	98	109	95	115	100	110	97	106	95	104	95	101	93	96	91	89	87		
5.00	122	103	117	100	112	98	117	101	113	99	109	97	106	97	103	95	98	93	91	89		
10.00	126	105	123	104	121	103	122	104	119	103	117	102	111	101	101	100	103	98	96	94		

