

# 東芝照明器具配光データシート


|     |                  |
|-----|------------------|
| 名 称 | 東芝LED照明器具        |
| 形 名 | LEKD253025WY-LD9 |

|      |                                                                                     |         |
|------|-------------------------------------------------------------------------------------|---------|
| 効 率  | F  | 0 %     |
|      | F  | 100 %   |
|      | F  | 100 %   |
| 器具光束 |                                                                                     | 2500 lm |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.81 |
|     | 中 | 0.77 |
|     | 否 | 0.68 |

|        |       |
|--------|-------|
| 最大取付間隔 |       |
| A-A    | 1.3 H |
| B-B    | 1.3 H |

|     |      |
|-----|------|
| 前 面 | 下面開放 |
| 反射面 | 白色   |

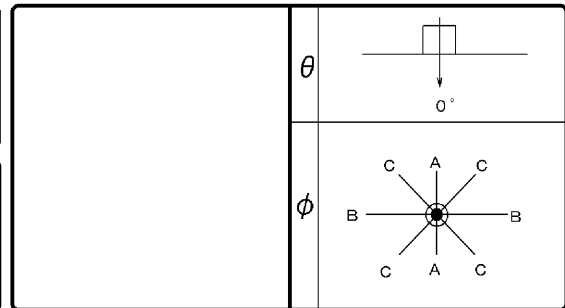

|    |                  |
|----|------------------|
| 備考 | LEKD253025WY-LD9 |
|----|------------------|

| 光度 (cd/1000lm) |     |     |     |
|----------------|-----|-----|-----|
| θ \ φ          | A-A | B-B | C-C |
| 0°             | 438 |     |     |
| 10°            | 434 |     |     |
| 20°            | 416 |     |     |
| 30°            | 378 |     |     |
| 40°            | 314 |     |     |
| 50°            | 219 |     |     |
| 60°            | 101 |     |     |
| 70°            | 28  |     |     |
| 80°            | 14  |     |     |
| 90°            | 0   |     |     |
| 100°           | 0   |     |     |
| 110°           | 0   |     |     |
| 120°           | 0   |     |     |
| 130°           | 0   |     |     |
| 140°           | 0   |     |     |
| 150°           | 0   |     |     |
| 160°           | 0   |     |     |
| 170°           | 0   |     |     |
| 180°           | 0   |     |     |

| 反射率 (%) | 天井            | 80  |     |     |     |     |     | 70  |     |     |     |     |     | 50  |     |     |     |    |    | 30 | 20 | 0 |
|---------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|---|
|         | 壁             | 70  | 50  | 30  | 70  | 50  | 30  | 70  | 50  | 30  | 50  | 30  | 30  | 50  | 30  | 30  | 10  | 10 | 0  |    |    |   |
|         | 床             | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30 | 10 | 10 | 0  |   |
| 室指数     | 固有照明率 (×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |    |   |
| 0.60    | 69            | 63  | 56  | 53  | 48  | 46  | 67  | 62  | 55  | 52  | 47  | 46  | 53  | 51  | 47  | 46  | 46  | 45 | 41 | 40 |    |   |
| 0.80    | 82            | 74  | 69  | 65  | 61  | 58  | 80  | 73  | 68  | 64  | 60  | 58  | 66  | 63  | 59  | 57  | 58  | 57 | 53 | 51 |    |   |
| 1.00    | 89            | 80  | 76  | 71  | 68  | 65  | 86  | 78  | 75  | 70  | 67  | 64  | 73  | 69  | 66  | 64  | 65  | 63 | 59 | 57 |    |   |
| 1.25    | 96            | 85  | 85  | 78  | 76  | 72  | 93  | 84  | 83  | 77  | 75  | 71  | 80  | 75  | 73  | 70  | 72  | 69 | 66 | 64 |    |   |
| 1.50    | 101           | 89  | 90  | 82  | 82  | 76  | 98  | 87  | 88  | 81  | 81  | 76  | 85  | 79  | 79  | 75  | 76  | 74 | 70 | 69 |    |   |
| 2.00    | 108           | 94  | 99  | 89  | 92  | 84  | 105 | 93  | 97  | 88  | 90  | 83  | 92  | 86  | 87  | 82  | 84  | 81 | 78 | 76 |    |   |
| 2.50    | 112           | 97  | 104 | 92  | 98  | 88  | 109 | 96  | 102 | 91  | 96  | 88  | 97  | 89  | 92  | 86  | 88  | 85 | 82 | 80 |    |   |
| 3.00    | 115           | 99  | 108 | 95  | 102 | 91  | 112 | 98  | 105 | 94  | 100 | 91  | 100 | 92  | 96  | 89  | 92  | 88 | 85 | 83 |    |   |
| 4.00    | 119           | 101 | 114 | 98  | 109 | 95  | 115 | 100 | 110 | 97  | 106 | 95  | 104 | 95  | 101 | 93  | 96  | 91 | 89 | 87 |    |   |
| 5.00    | 122           | 103 | 117 | 100 | 112 | 98  | 117 | 101 | 113 | 99  | 109 | 97  | 106 | 97  | 103 | 95  | 98  | 93 | 91 | 89 |    |   |
| 10.00   | 126           | 105 | 123 | 104 | 121 | 103 | 122 | 104 | 119 | 103 | 117 | 102 | 111 | 101 | 110 | 100 | 103 | 98 | 96 | 94 |    |   |

