

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKD102025LY-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		970 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

前 面	下面開放
反射面	白色

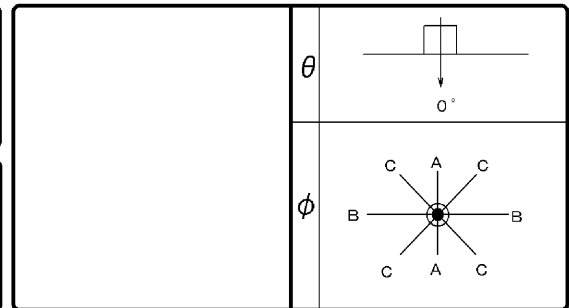

備考	LEKD102025LY-LD9
----	------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	679		
10°	641		
20°	521		
30°	383		
40°	278		
50°	170		
60°	92		
70°	26		
80°	5		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		74	68	62	59	55	53	73	67	61	58	54	53	60	58	54	52	53	52	48	47			
0.80		87	79	75	70	67	65	85	78	74	70	67	64	72	69	66	64	65	63	60	58			
1.00		93	83	81	76	74	70	90	82	80	75	73	70	78	74	72	69	70	68	65	63			
1.25		99	88	89	81	81	76	97	87	87	80	80	76	84	79	78	75	76	74	71	69			
1.50		104	91	94	85	86	80	101	90	92	84	85	80	88	83	83	79	80	78	75	73			
2.00		110	96	102	91	95	87	107	95	99	90	93	86	95	88	90	85	87	84	81	79			
2.50		114	98	107	94	100	91	110	97	104	93	98	90	99	91	94	89	91	87	85	83			
3.00		117	100	110	97	105	93	113	99	107	96	102	93	102	94	98	91	94	90	87	86			
4.00		120	102	115	100	110	97	116	101	112	99	108	96	106	97	102	95	98	93	91	89			
5.00		122	104	118	101	114	99	118	102	114	100	111	98	108	98	105	97	100	95	93	91			
10.00		127	106	124	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	97	95			

