


東芝照明器具配光データシート

名 称	東芝LED照明器具
形 名	LEKD2533024WWV-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		2050 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

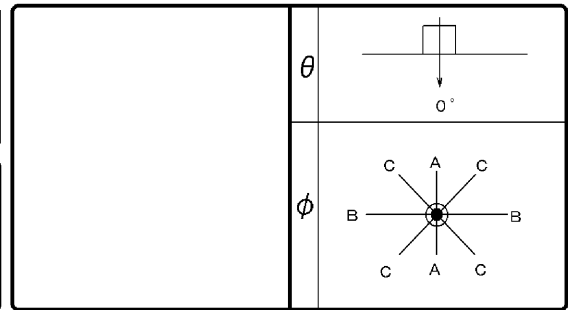

前 面	下面開放
反射面	銀色鏡面仕上げ

備考	LEKD2533024WWV-LS9
----	--------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1256		
10°	1151		
20°	808		
30°	504		
40°	179		
50°	46		
60°	7		
70°	2		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		固有照明率 (×0.01)																						
0.60		90	83	81	77	76	74	89	83	81	77	76	73	79	76	75	73	74	73	70	69			
0.80		102	92	93	87	88	84	100	91	92	87	87	84	90	86	86	84	85	83	81	80			
1.00		105	94	97	90	91	87	103	94	96	89	91	86	93	88	89	86	88	85	83	82			
1.25		109	97	101	93	96	90	107	96	100	92	94	89	97	91	92	88	90	88	86	85			
1.50		112	99	105	95	99	92	109	98	103	94	98	92	99	93	95	91	93	90	88	87			
2.00		116	101	110	98	105	96	113	100	107	97	103	95	103	96	100	94	96	93	91	90			
2.50		119	102	113	100	108	98	115	101	110	99	106	97	105	97	102	96	99	95	93	91			
3.00		121	103	116	101	111	99	117	102	113	100	109	99	107	99	104	97	100	96	94	93			
4.00		123	105	119	103	116	102	119	104	116	102	113	101	110	100	107	99	103	98	96	95			
5.00		125	106	121	104	118	103	121	105	118	103	115	102	111	101	109	100	104	99	97	96			
10.00		128	107	127	107	125	106	124	106	122	106	121	105	115	104	114	103	107	101	100	98			

