

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-183003M-LS9 + LEEU-2506N-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1410 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

前 面	下面開放
反射面	白色

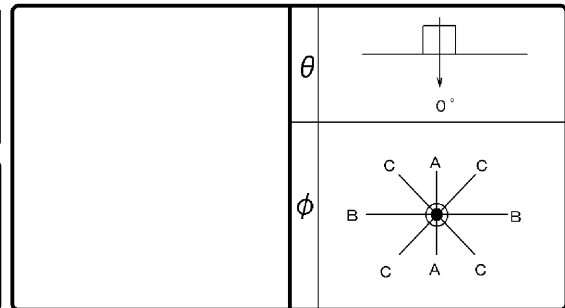

備考	LEDD-183003M-LS9+LEEU-2506N-03
----	--------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	855		
10°	844		
20°	668		
30°	448		
40°	213		
50°	92		
60°	56		
70°	29		
80°	12		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数	固有照明率 (×0.01)																					
0.60	81	75	70	67	64	62	80	74	70	67	64	62	68	66	63	61	62	61	58	57		
0.80	93	84	83	77	76	73	91	83	82	77	75	73	80	76	74	72	73	72	69	68		
1.00	98	88	88	81	81	77	95	87	86	81	80	76	84	80	79	76	77	75	72	71		
1.25	103	91	93	86	86	81	100	90	92	85	85	81	89	83	83	80	81	79	76	75		
1.50	106	94	97	89	91	84	104	93	96	88	90	84	92	86	87	83	85	82	79	78		
2.00	112	98	104	93	98	90	109	96	102	92	96	89	98	91	93	88	90	87	84	83		
2.50	115	100	108	96	103	93	112	98	106	95	101	92	101	93	97	91	93	89	87	85		
3.00	118	101	112	98	106	95	114	100	109	97	104	94	103	95	100	93	96	91	89	88		
4.00	121	103	116	100	112	98	117	102	113	99	109	97	107	97	104	96	99	94	92	90		
5.00	123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	94	92		
10.00	127	106	125	105	123	104	123	105	121	104	119	103	113	102	112	101	105	100	98	96		

