


東芝照明器具配光データシート

名 称	東芝LED照明器具
形 名	LEKD1533024W-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1160 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

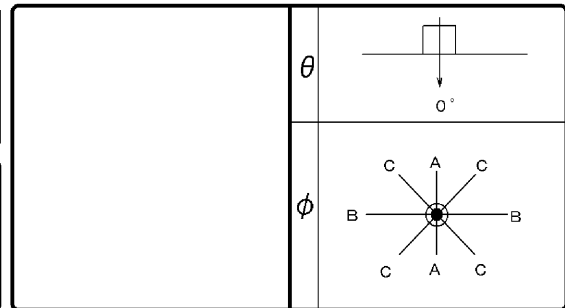

前 面	下面開放
反射面	白色

備考	LEKD1533024W-LD9
----	------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	764		
10°	733		
20°	626		
30°	477		
40°	220		
50°	94		
60°	59		
70°	37		
80°	18		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	固有照明率 (×0.01)																					
0.60	79	73	68	65	61	59	78	72	67	64	61	59	66	63	60	59	60	58	55	54		
0.80	91	83	80	75	73	70	89	82	79	75	73	70	77	74	72	70	71	69	66	65		
1.00	96	86	86	79	79	75	94	85	84	79	78	74	82	78	76	74	75	73	70	68		
1.25	102	90	92	84	85	79	99	89	90	83	83	79	87	82	81	78	80	77	74	73		
1.50	105	93	96	87	89	83	103	92	94	86	88	82	91	85	85	81	83	80	78	76		
2.00	111	97	103	92	97	88	108	96	101	91	95	88	96	90	92	87	89	85	83	81		
2.50	115	99	107	95	102	92	111	98	105	94	100	91	100	92	96	90	92	88	86	84		
3.00	117	101	111	97	105	94	113	99	108	96	103	93	102	94	99	92	95	90	88	86		
4.00	121	103	115	100	111	97	117	101	112	99	108	97	106	97	103	95	98	93	91	90		
5.00	123	104	118	101	114	99	118	102	115	100	111	99	108	98	105	97	100	95	93	91		
10.00	127	106	125	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	98	96		

