

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKD2536020L2-LS9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		2000 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

前 面	下面開放
反射面	白色

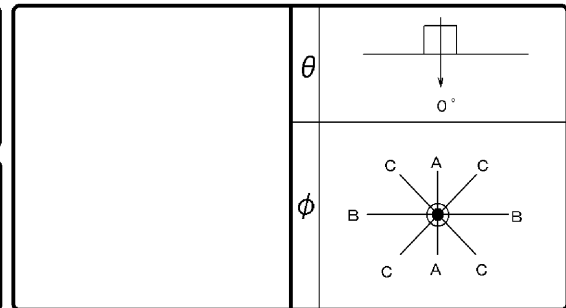

備考	LEKD2536020L2-LS9
----	-------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	484		
10°	484		
20°	487		
30°	468		
40°	351		
50°	141		
60°	63		
70°	27		
80°	6		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		73	68	61	58	54	52	72	66	60	58	53	52	59	57	53	51	52	51	47	46		
0.80		86	78	75	70	67	64	84	77	74	69	67	64	72	68	65	63	64	63	59	58		
1.00		93	83	82	76	74	70	90	82	80	75	73	70	78	74	72	69	70	68	65	63		
1.25		100	89	89	82	82	76	97	87	87	81	80	76	84	79	78	75	77	74	71	69		
1.50		104	92	94	85	87	81	101	90	92	85	86	80	89	83	83	79	81	78	75	74		
2.00		111	96	102	92	96	88	108	95	100	91	94	87	96	89	91	86	88	85	82	80		
2.50		114	99	107	95	101	91	111	97	104	94	99	90	99	92	95	89	92	88	85	84		
3.00		117	100	111	97	105	94	113	99	108	96	103	93	102	94	98	92	94	90	88	86		
4.00		121	103	115	100	111	97	117	101	112	99	108	96	106	97	103	95	98	93	91	89		
5.00		123	104	118	101	114	99	118	102	114	100	111	98	108	98	105	97	100	95	93	91		
10.00		127	106	124	105	122	103	122	105	120	104	118	102	112	101	111	100	104	99	97	95		

