

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-186000M-LS9 + LEEU-2505WW-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1940 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

前 面	下面開放
反射面	白色

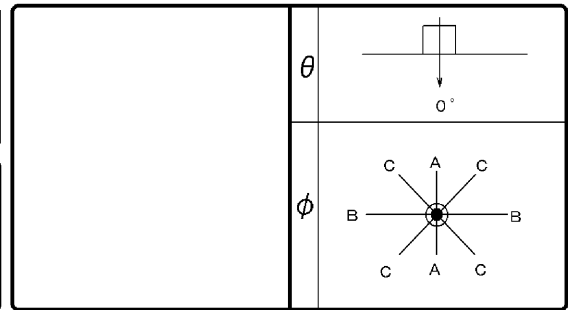

備考	LEDD-186000M-LS9+LEEU-2505WW-03
----	---------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	844		
10°	739		
20°	560		
30°	449		
40°	316		
50°	132		
60°	37		
70°	16		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		79	72	67	64	61	59	77	71	67	64	60	58	65	63	59	58	59	58	55	53			
0.80		91	83	81	76	74	71	89	82	79	75	73	70	78	74	72	70	71	69	66	65			
1.00		97	87	86	80	79	75	94	86	85	80	79	75	83	78	77	74	76	74	71	69			
1.25		103	91	93	85	86	81	100	90	91	85	85	80	88	83	83	80	81	79	76	74			
1.50		107	94	98	89	91	85	104	93	96	88	90	84	92	86	87	83	85	82	79	78			
2.00		113	98	105	94	99	90	109	97	103	93	97	90	98	91	94	89	91	87	85	84			
2.50		116	100	109	97	104	93	112	99	107	96	102	93	102	94	98	92	94	90	88	86			
3.00		118	102	112	98	107	96	115	100	109	98	105	95	104	96	101	94	96	92	90	89			
4.00		122	103	117	101	112	99	118	102	113	100	110	98	107	98	104	96	100	95	93	91			
5.00		123	104	119	102	116	101	119	103	116	101	112	100	109	99	107	98	101	96	95	93			
10.00		127	106	125	105	123	104	123	105	121	104	119	103	113	102	112	101	105	100	98	96			

