

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-18705M-LS9 + LEEU-2506N-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	2050 lm

保守 率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

前 面	下面開放
反射面	銀色梨地仕上げ

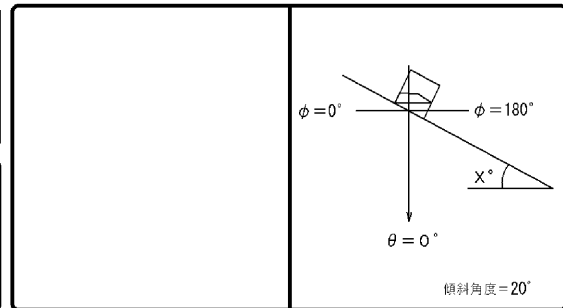

備考	LEDD-18705M-LS9+LEEU-2506N-03
----	-------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	720		
10°	685		
20°	593		
30°	494		
40°	323		
50°	124		
60°	26		
70°	4		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		79	73	68	65	62	60	78	72	68	64	61	59	66	64	60	59	60	59	56	54		
0.80		92	84	82	77	75	72	90	83	81	76	74	72	79	75	73	71	72	70	68	66		
1.00		98	88	88	81	81	77	95	87	86	81	80	76	84	80	78	76	77	75	72	71		
1.25		104	92	94	86	87	82	101	91	93	86	86	82	90	84	84	81	82	80	77	76		
1.50		107	95	99	90	92	86	105	94	97	89	91	85	93	87	88	84	86	83	81	79		
2.00		113	99	106	95	100	91	110	98	104	94	98	91	99	92	95	90	92	89	86	85		
2.50		117	101	110	97	105	94	113	99	107	96	103	94	102	95	99	92	95	91	89	87		
3.00		119	102	113	99	108	97	115	101	110	98	106	96	105	96	101	94	97	93	91	89		
4.00		122	104	117	101	113	99	118	102	114	100	110	99	108	99	105	97	100	95	94	92		
5.00		124	105	120	103	116	101	119	103	116	102	113	100	109	100	107	98	102	97	95	93		
10.00		127	106	125	105	123	104	123	105	121	104	119	103	113	102	112	101	105	100	98	96		

