

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-18705M-LS9 + LEEU-2505W-03

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	2100 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

前 面	下面開放
反射面	銀色梨地仕上げ

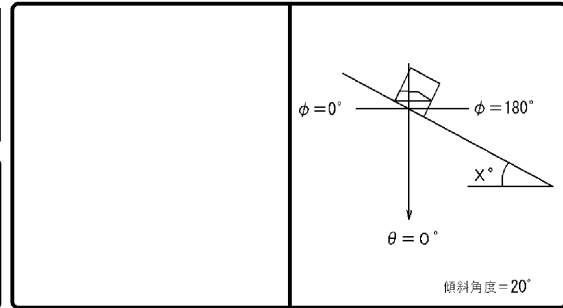

備 考	LEDD-18705M-LS9+LEEU-2505W-03
--------	-------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	918		
10°	797		
20°	579		
30°	443		
40°	294		
50°	129		
60°	44		
70°	8		
80°	2		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		80	73	69	65	62	60	78	72	68	65	62	60	66	64	61	59	60	59	56	55		
0.80		92	84	82	76	75	72	90	83	81	76	74	71	79	75	73	71	72	70	67	66		
1.00		97	87	87	81	80	76	95	86	86	80	80	76	84	79	78	75	77	75	72	70		
1.25		103	92	94	86	87	81	101	90	92	85	86	81	89	84	84	80	82	79	77	75		
1.50		107	94	98	89	92	85	104	93	96	88	90	85	93	87	88	84	85	83	80	79		
2.00		113	98	105	94	99	91	110	97	103	93	98	90	99	92	94	89	91	88	85	84		
2.50		116	100	109	97	104	94	113	99	107	96	102	93	102	94	98	92	94	90	88	87		
3.00		118	102	113	99	108	96	115	100	110	98	105	95	104	96	101	94	97	92	90	89		
4.00		122	103	117	101	113	99	118	102	113	100	110	98	107	98	104	97	100	95	93	91		
5.00		123	104	119	102	116	101	119	103	116	101	113	100	109	100	107	98	102	97	95	93		
10.00		127	106	125	105	123	105	123	105	121	104	119	104	113	102	112	102	106	100	98	96		

