

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-183003MK-LS9 + LEE U-2505N-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
	器具 光束	1290 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

前 面	下面開放
反射面	黒色

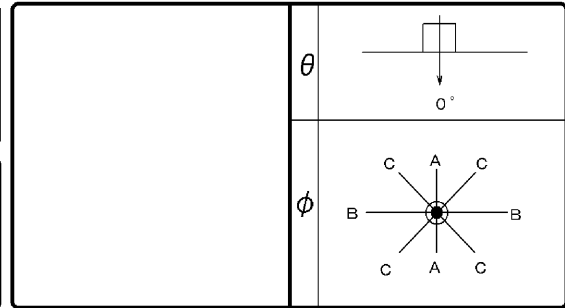

備 考	LEDD-183003MK-LS9+LEEU-2505N-03
--------	---------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	937		
10°	848		
20°	644		
30°	466		
40°	265		
50°	75		
60°	37		
70°	23		
80°	10		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30						20					
	壁	70						50						30						10						0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室指数		固有照明率 (×0.01)																													
0.60		82	75	71	68	65	63	80	74	71	67	64	63	69	66	64	62	63	62	59	58										
0.80		94	85	84	78	77	74	92	84	83	78	77	74	81	77	75	73	74	73	70	69										
1.00		98	88	89	82	82	78	96	87	87	82	81	78	85	81	80	77	78	76	74	72										
1.25		104	92	94	87	88	82	101	91	93	86	87	82	90	85	85	81	83	80	78	76										
1.50		107	95	99	90	92	86	104	93	97	89	91	85	93	87	88	84	86	83	81	79										
2.00		113	98	105	94	99	91	110	97	103	93	98	90	99	92	94	89	91	88	85	84										
2.50		116	100	109	97	104	94	112	99	107	96	102	93	102	94	98	92	94	90	88	86										
3.00		118	101	112	98	107	96	115	100	109	97	105	95	104	96	100	94	96	92	90	88										
4.00		121	103	116	101	112	99	117	102	113	100	109	98	107	98	104	96	99	95	93	91										
5.00		123	104	119	102	115	100	119	103	115	101	112	100	109	99	106	98	101	96	94	93										
10.00		127	106	125	105	123	104	123	105	121	104	119	103	113	102	112	101	105	100	98	96										

