


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEKD1536425N-LS9

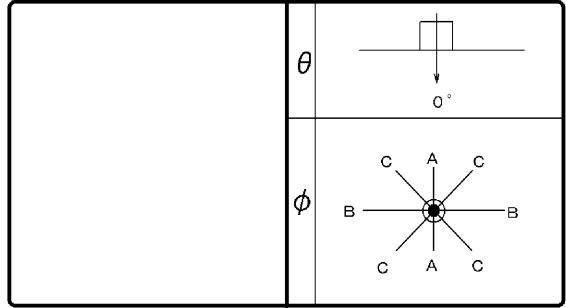

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	1320 lm

保 守 率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	白色

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備考	LEKD1536425N-LS9
----	------------------

$\theta \setminus \phi$	A-A	B-B	C-C
0°	759		
10°	719		
20°	553		
30°	467		
40°	302		
50°	97		
60°	50		
70°	28		
80°	12		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		30		10		10		30		10		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数		固有照明率 (×0.01)																																			
0.60	78	72	67	63	60	58	77	71	66	63	60	58	65	62	59	57	58	57	54	53																	
0.80	90	82	80	75	73	70	88	81	79	74	72	69	77	73	71	69	70	68	65	64																	
1.00	96	86	85	79	78	74	94	85	84	79	77	74	82	77	76	73	74	73	69	68																	
1.25	102	90	92	84	85	79	99	89	90	83	84	79	87	82	82	78	80	77	74	73																	
1.50	106	93	96	88	90	83	103	92	94	87	88	83	91	85	86	82	83	81	78	76																	
2.00	112	97	104	93	97	89	109	96	101	92	96	88	97	90	92	87	89	86	83	82																	
2.50	115	99	108	95	102	92	112	98	105	95	100	92	100	93	96	90	93	89	86	85																	
3.00	118	101	111	98	106	95	114	100	108	97	104	94	103	95	99	92	95	91	89	87																	
4.00	121	103	116	100	111	98	117	102	112	99	108	97	106	97	103	95	99	94	92	90																	
5.00	123	104	119	102	115	100	119	103	115	101	111	99	108	99	106	97	100	96	94	92																	
10.00	127	106	125	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	98	96																	

