

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEDD-186400M-LS9 + LEEU-2505L2-03

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		1720 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

前 面	下面開放
反射面	白色

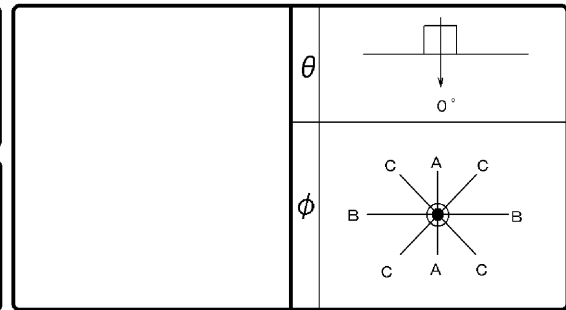

備考	LEDD-186400M-LS9+LEEU-2505L2-03
----	---------------------------------

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	867		
10°	762		
20°	572		
30°	453		
40°	311		
50°	110		
60°	33		
70°	21		
80°	9		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30	20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数	固有照明率 (×0.01)																					
0.60	79	73	68	65	61	60	78	72	67	64	61	59	66	63	60	59	60	59	55	54		
0.80	92	83	81	76	74	71	90	82	80	76	74	71	78	75	73	70	71	70	67	66		
1.00	97	87	87	80	80	76	95	86	85	80	79	75	83	79	77	75	76	74	71	70		
1.25	103	91	93	85	86	81	100	90	91	85	85	80	88	83	83	80	81	79	76	74		
1.50	107	94	98	89	91	84	104	93	96	88	90	84	92	86	87	83	85	82	79	78		
2.00	113	98	105	94	99	90	109	97	102	93	97	89	98	91	94	88	91	87	85	83		
2.50	116	100	109	96	103	93	112	99	106	95	101	92	101	94	97	91	94	90	88	86		
3.00	118	101	112	98	107	95	115	100	109	97	105	95	104	95	100	93	96	92	90	88		
4.00	121	103	116	101	112	99	117	102	113	100	109	98	107	98	104	96	99	95	93	91		
5.00	123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	94	93		
10.00	127	106	125	105	123	104	123	105	121	104	119	103	113	102	112	101	105	99	98	96		

