


東芝照明器具配光データシート

名称	東芝LED照明器具
形名	LEDD-188007M-LD9 + LEEU-1506L-03

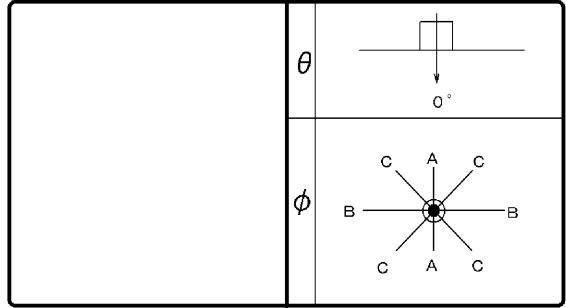

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	1070 lm

保守率	良	0.83
	中	0.81
	否	0.77

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	LEDD-188007M-LD9+LEEU-1506L-03
----	--------------------------------

前面	カバー (透明)
反射面	白

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	539		
10°	531		
20°	499		
30°	428		
40°	348		
50°	165		
60°	48		
70°	25		
80°	9		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	固有照明率 (×0.01)																																				
0.60	74	68	61	58	54	52	72	67	61	58	54	52	59	57	53	52	52	51	48	46																	
0.80	87	79	75	70	67	65	85	77	74	70	67	64	72	69	66	64	65	63	60	58																	
1.00	93	83	82	76	74	70	91	82	80	75	73	70	78	74	72	69	70	69	65	64																	
1.25	100	89	89	82	82	77	97	87	87	81	81	76	84	79	79	75	77	74	71	69																	
1.50	104	92	94	85	87	81	101	90	92	85	86	80	89	83	83	79	81	78	75	74																	
2.00	111	96	102	91	96	87	107	95	100	91	94	87	96	89	91	86	88	85	82	80																	
2.50	114	99	107	95	101	91	111	97	104	94	99	90	99	92	95	89	91	88	85	83																	
3.00	117	100	110	97	105	94	113	99	108	96	103	93	102	94	98	91	94	90	88	86																	
4.00	120	102	115	100	110	97	116	101	112	99	108	96	106	97	102	95	98	93	91	89																	
5.00	122	103	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91																	
10.00	127	106	124	105	122	103	122	105	120	103	118	102	112	101	110	100	104	98	97	95																	

