

東芝照明器具配光データシート


名 称	東芝LED照明器具
形 名	LEKD60073WW-LD9

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束		5600 lm

保守率	良	0.81
	中	0.77
	否	0.68

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

前 面	下面開放
反射面	銀色梨地仕上げ

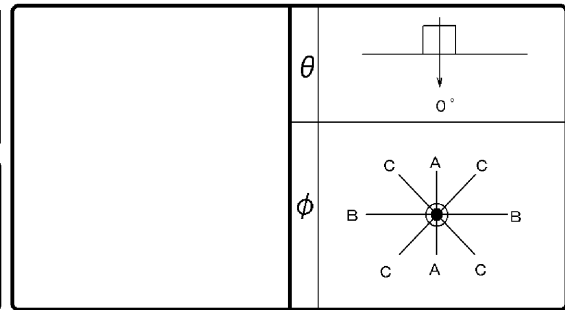

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1126		
10°	1068		
20°	899		
30°	443		
40°	154		
50°	66		
60°	23		
70°	0		
80°	1		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		固有照明率 (×0.01)																						
0.60		89	82	80	76	75	72	88	81	79	76	74	72	78	75	73	72	73	71	69	68			
0.80		100	91	92	86	86	83	99	90	91	86	86	83	89	85	85	82	84	82	80	79			
1.00		104	93	96	89	90	85	102	93	94	88	89	85	92	87	88	84	86	84	82	81			
1.25		108	96	100	92	94	88	105	95	98	91	93	88	95	90	91	87	89	86	84	83			
1.50		111	98	103	94	98	91	108	97	101	93	96	90	98	92	94	89	92	89	87	85			
2.00		115	100	109	97	103	94	112	99	106	96	102	94	102	95	98	93	95	92	90	88			
2.50		118	102	112	99	107	97	114	101	109	98	105	96	104	97	101	95	97	94	92	90			
3.00		120	103	115	100	110	98	116	102	112	100	108	98	106	98	103	96	99	95	93	92			
4.00		123	104	118	102	115	101	119	103	115	101	112	100	109	100	107	98	102	97	95	94			
5.00		124	105	121	104	118	102	120	104	117	103	114	101	111	101	109	100	103	98	97	95			
10.00		128	107	126	106	124	106	123	106	122	105	120	105	114	103	113	103	107	101	100	98			

