

東芝照明器具配光データシート


名 称	LED高天井用照明器具
形 名	LEDJ16902N-LS90P

効 率	F 	0 %
	F 	100 %
	F 	100 %
器具光束	16700 lm	

保守率	良	0.88
	中	0.86
	否	0.81

最大取付間隔		
A-A	1.1	H
B-B	1.1	H

前 面	カバー（透明）
反射面	白色

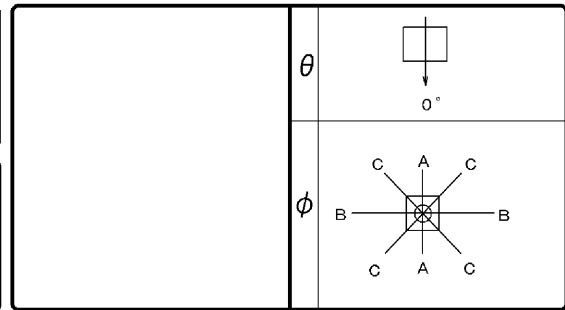

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	515		
10°	517		
20°	468		
30°	385		
40°	332		
50°	200		
60°	68		
70°	31		
80°	6		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30			20	0
	壁	70		50		30		70		50		30		50		30		30			10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		固有照明率 (×0.01)																						
0.60		72	66	59	56	51	50	70	65	58	56	51	50	57	55	50	49	50	49	45	44			
0.80		85	77	73	68	65	62	83	76	71	67	64	62	69	66	63	61	62	61	57	55			
1.00		91	82	80	74	72	68	89	81	78	73	71	68	76	72	69	67	68	66	63	61			
1.25		98	87	87	80	80	75	96	86	86	79	78	74	83	78	76	73	75	72	69	67			
1.50		103	91	93	84	85	79	100	89	91	83	84	79	87	82	81	78	79	77	73	72			
2.00		110	96	101	90	94	86	107	94	99	90	93	86	94	88	89	84	86	83	80	79			
2.50		114	98	106	94	100	90	110	97	103	93	98	89	98	91	94	88	90	87	84	82			
3.00		117	100	110	96	104	93	113	99	107	95	102	92	101	93	97	91	93	89	87	85			
4.00		120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	93	90	89			
5.00		122	103	118	101	114	99	118	102	114	100	110	98	107	98	105	96	99	94	92	91			
10.00		127	106	124	105	122	103	122	105	120	103	118	102	112	101	110	100	104	98	97	95			

