

東芝照明器具配光データシート


名 称	東芝LED屋内用ライン器具
形 名	LEDL-09401WW-LS9

効 率	F 	4 %
	F 	96 %
	F 	100 %
器具光束		1770 lm

保守率	良	0.69
	中	0.67
	否	0.63

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

前 面	カバー（乳白）
反射面	

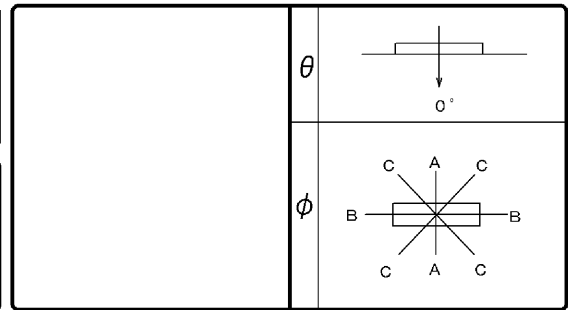

備考	
----	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0																							
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0																	
0°	362	362	362			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0																		
10°	354	354	355			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0																		
20°	333	333	333	室指数																								固 有 照 明 率 (×0.01)																							
30°	297	297	297	0.60	63	58	49	47	41	40	61	57	48	46	40	39	47	45	39	38	38	38	33	32																											
40°	247	247	249	0.80	75	68	61	58	53	50	73	67	60	57	52	50	58	55	50	49	49	48	43	41																											
50°	192	190	192	1.00	82	74	69	64	60	57	80	72	67	63	59	56	64	61	57	55	55	54	49	47																											
60°	136	132	136	1.25	90	80	77	71	68	64	87	78	75	69	67	63	71	67	64	61	62	60	56	53																											
70°	86	77	83	1.50	95	84	83	75	74	68	91	82	80	74	72	68	76	71	69	66	67	65	60	58																											
80°	43	29	37	2.00	103	90	92	82	84	77	99	88	90	81	82	76	84	78	78	74	75	72	68	65																											
90°	20	2	13	2.50	107	93	98	87	90	81	103	91	95	85	88	80	89	82	84	78	80	76	73	70																											
100°	19	2	12	3.00	111	95	103	90	96	85	106	93	99	88	93	84	93	85	88	82	83	80	76	74																											
110°	15	1	8	4.00	115	98	109	94	103	90	111	96	105	92	99	89	98	89	94	87	88	84	81	78																											
120°	11	1	6	5.00	118	100	112	96	107	93	113	98	108	95	104	92	101	92	97	89	91	87	84	81																											
130°	5	1	6	10.00	124	103	120	102	117	100	119	102	116	100	113	98	107	97	105	96	98	93	91	88																											
140°	4	1	5																																																
150°	3	2	3																																																
160°	3	2	2																																																
170°	2	2	2																																																
180°	2	2	2																																																

