


東芝照明器具配光データシート

名称	東芝LED屋内用ライン器具
形名	LEDL-15401L-LS9

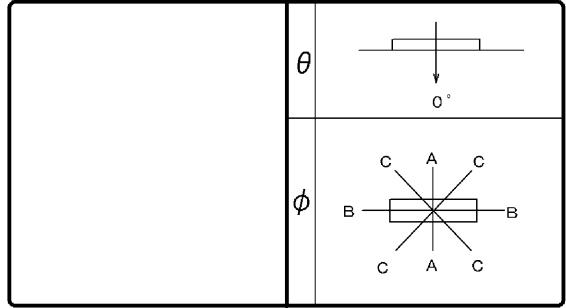

効 率	F ◡	4 %
	F ◡	96 %
	F ○	100 %
	器具 光束	2900 lm

保 守 率	良	0.69
	中	0.67
	否	0.63

前面	カバー (乳白)
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	362	362	362
10°	354	354	355
20°	333	333	333
30°	297	297	297
40°	247	248	249
50°	192	190	192
60°	136	132	136
70°	86	77	83
80°	44	28	37
90°	20	2	13
100°	19	2	12
110°	15	1	8
120°	11	1	6
130°	5	1	6
140°	4	1	5
150°	3	2	3
160°	3	2	2
170°	2	2	2
180°	2	2	2

反 射 率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数	固有照明率 (×0.01)																							
0.60	63	58	49	47	41	40	61	57	48	46	40	39	47	45	39	38	38	33	32					
0.80	75	68	62	58	53	50	73	67	60	57	52	50	58	55	50	49	49	48	43	41				
1.00	82	74	69	64	60	57	80	72	67	63	59	56	64	61	57	55	55	54	49	47				
1.25	90	80	77	71	68	64	87	78	75	69	67	63	71	67	64	61	62	60	56	53				
1.50	95	84	83	75	74	68	91	82	80	74	72	68	76	71	69	66	67	65	60	58				
2.00	103	90	92	83	84	77	99	88	90	81	82	76	84	79	78	74	75	72	68	65				
2.50	107	93	98	87	90	82	103	91	95	85	88	80	89	82	84	78	80	76	73	70				
3.00	111	95	103	90	96	85	107	93	99	88	93	84	93	86	88	82	83	80	76	74				
4.00	115	98	109	94	103	90	111	96	105	92	99	89	98	89	94	87	88	84	81	78				
5.00	118	100	112	96	107	93	113	98	108	95	104	92	101	92	97	89	91	87	84	81				
10.00	124	103	121	102	117	100	119	102	116	100	113	98	107	97	105	96	98	93	91	88				

