


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87006N-LS

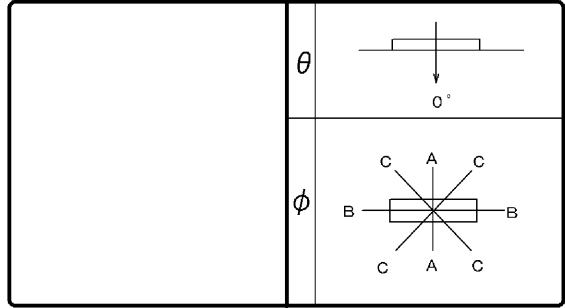

効率	F	20%
	F	80%
	F	100%
	器具光束	1050 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.4 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	206	206	206
10°	206	201	204
20°	204	189	197
30°	198	170	185
40°	188	146	169
50°	175	116	150
60°	159	84	128
70°	142	49	107
80°	124	17	87
90°	106	0	69
100°	89	0	55
110°	72	0	43
120°	57	0	33
130°	43	1	25
140°	31	1	18
150°	21	1	13
160°	12	1	7
170°	5	1	3
180°	1	2	2

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0					
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																							
0.60	55	51	41	39	32	31	52	49	39	37	31	30	36	35	29	28	27	26	22	19				
0.80	66	60	51	48	42	40	63	57	49	46	40	39	45	43	38	36	35	34	29	26				
1.00	73	66	58	54	48	46	69	63	56	52	47	44	51	48	43	42	40	39	34	30				
1.25	81	72	66	61	56	53	76	68	63	59	54	51	58	54	50	48	46	45	39	35				
1.50	86	75	72	65	62	57	81	72	68	63	59	56	62	58	55	52	50	49	43	39				
2.00	94	82	82	73	72	66	88	78	78	70	69	64	70	65	63	59	58	56	50	45				
2.50	99	85	88	77	79	71	93	82	83	75	75	69	75	69	68	64	62	60	54	50				
3.00	102	88	92	81	84	75	96	84	87	78	80	72	79	72	73	68	66	63	58	53				
4.00	107	91	99	86	92	80	101	88	94	83	87	78	84	77	79	73	71	68	63	58				
5.00	110	93	103	88	97	84	104	90	97	85	92	81	87	79	83	76	75	71	66	61				
10.00	117	98	113	95	109	92	110	94	106	92	103	89	95	86	92	84	83	78	74	68				

