


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87007N-LS

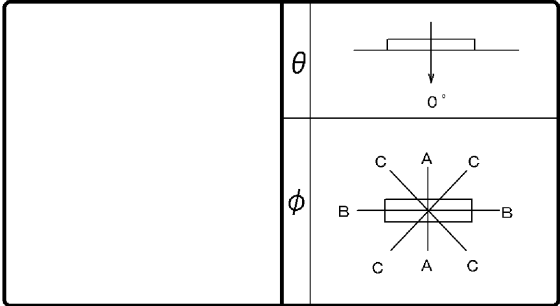

効 率	F	20%
	F	80%
	F	100%
	器具光束	1050 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.4 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	210	209	210
10°	208	205	207
20°	205	193	199
30°	198	174	186
40°	187	149	169
50°	173	119	149
60°	157	86	127
70°	140	51	105
80°	122	18	85
90°	104	0	68
100°	87	0	54
110°	71	0	42
120°	56	1	33
130°	43	1	26
140°	31	1	19
150°	21	1	13
160°	13	1	8
170°	6	2	3
180°	2	2	2

反射率 (%)	天井	80						70						50						30		20		0											
	壁	70	50	30	70	50	30	50	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																																		
0.60	55	51	41	39	32	31	53	49	39	37	31	30	36	35	29	28	27	27	22	19															
0.80	66	60	51	48	42	40	63	57	49	47	40	39	45	43	38	37	35	34	29	26															
1.00	73	66	58	54	49	46	69	63	56	52	47	45	51	48	43	42	40	39	34	30															
1.25	81	72	66	61	56	53	76	68	63	59	54	51	58	54	50	48	46	45	39	35															
1.50	86	75	72	65	62	58	81	72	69	63	59	56	62	58	55	52	50	49	43	39															
2.00	94	82	82	73	72	66	88	78	78	70	69	64	70	65	63	60	58	56	50	46															
2.50	99	85	88	77	79	71	93	81	83	75	75	69	75	69	68	64	62	60	54	50															
3.00	102	88	92	81	84	75	96	84	87	78	80	72	79	72	73	68	66	63	58	53															
4.00	107	91	99	86	92	80	101	88	93	82	87	78	84	77	79	73	71	68	63	58															
5.00	110	93	103	88	97	84	104	90	97	85	92	81	87	79	83	76	75	71	66	61															
10.00	117	98	113	95	109	92	110	94	106	92	103	89	95	86	92	83	83	78	74	68															

