


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG87910L-LS

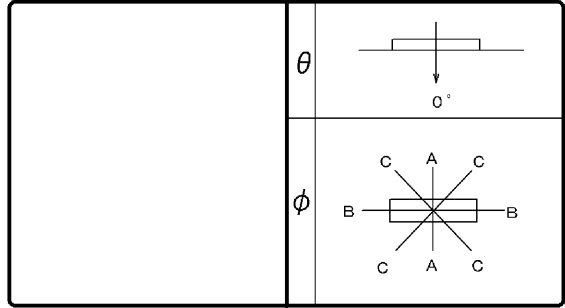

効 率	F	10%
	F	90%
	F	100%
	器具 光束	1150 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	271		
10°	266		
20°	251		
30°	228		
40°	199		
50°	167		
60°	134		
70°	102		
80°	74		
90°	51		
100°	33		
110°	20		
120°	11		
130°	5		
140°	1		
150°	1		
160°	1		
170°	1		
180°	1		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数	固有照明率 (×0.01)																							
0.60	58	53	44	41	35	34	56	52	42	40	34	33	40	38	33	32	31	31	26	24				
0.80	69	63	55	51	45	43	67	61	53	50	44	43	50	48	42	41	40	40	35	32				
1.00	76	69	62	57	52	49	73	66	60	56	51	48	56	53	48	47	46	45	40	37				
1.25	84	75	70	64	60	56	80	72	67	62	58	55	63	59	55	53	52	51	46	43				
1.50	89	78	75	68	66	61	85	76	73	67	64	60	68	63	60	57	57	55	50	47				
2.00	97	84	85	76	76	69	92	82	82	74	73	68	76	70	69	65	65	62	57	54				
2.50	102	88	91	80	82	74	97	85	87	78	80	73	81	75	74	70	70	67	62	58				
3.00	105	90	96	84	88	78	100	88	92	82	84	77	85	78	79	73	73	70	66	62				
4.00	110	94	102	88	95	84	105	91	98	86	91	82	90	82	85	78	79	75	71	67				
5.00	113	96	106	91	100	87	108	93	102	89	96	85	93	85	89	82	82	78	74	70				
10.00	120	100	116	98	112	95	114	98	110	95	107	93	101	91	98	89	90	85	82	78				

