

東芝照明器具配光データシート


名 称	東芝LED器具
形 名	LEET-41201-BD9+LEEM-40323N-01

効 率	F 	6 %
	F 	94 %
	F 	100 %
	器具 光束	3200 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

最大取付間隔		
A-A	1.3	H
B-B	1.2	H

前 面	カバー (乳白)
反射面	塗装 (白)

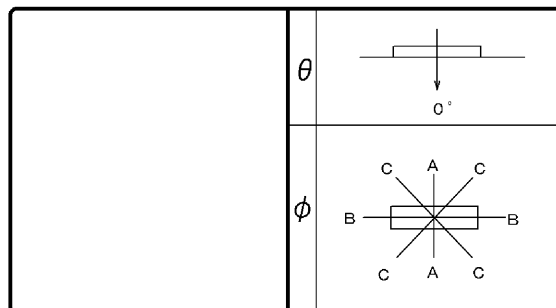

備 考	LEET-41201-BD9+LEEM-40323N-01
--------	-------------------------------

光度 (cd/1000lm)				反 射 率 (%)	天井	80						70						50						30		20	0	
$\theta \backslash \phi$	A-A	B-B	C-C		壁	70		50		30		70		50		30		50		30		30		10	0			
					固有照明率 (×0.01)																							
					床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10
室指数																												
0°	301	301	301	0.60	60	55	46	43	37	36	58	54	44	42	36	35	43	41	35	34	34	33	29	27				
10°	296	295	296	0.80	72	65	57	54	48	46	69	63	56	53	47	45	53	51	45	44	44	43	38	36				
20°	283	278	280	1.00	79	71	64	60	55	52	76	69	63	59	54	51	59	56	52	50	50	49	44	41				
30°	260	251	256	1.25	86	77	73	67	63	59	83	75	71	65	61	58	67	63	59	56	57	55	50	47				
40°	231	215	224	1.50	91	81	78	71	69	64	88	78	76	70	67	63	72	67	64	61	61	59	55	52				
50°	196	174	185	2.00	100	87	88	79	79	72	96	85	85	77	77	71	80	74	73	69	70	67	62	60				
60°	158	128	144	2.50	105	90	94	83	86	77	100	88	91	82	83	76	85	79	79	74	75	72	67	64				
70°	120	78	102	3.00	108	93	99	87	91	81	104	91	95	85	88	80	89	82	83	78	79	75	71	68				
80°	85	30	64	4.00	113	96	105	91	99	87	108	94	101	89	95	85	94	86	89	83	84	80	76	73				
90°	56	2	35	5.00	116	98	109	94	103	90	111	96	105	92	100	89	97	89	93	86	87	83	80	77				
100°	34	1	18	10.00	122	102	118	100	115	98	117	100	114	98	110	96	105	95	102	93	95	90	87	84				
110°	20	1	10																									
120°	13	1	7																									
130°	8	1	0																									
140°	0	0	0																									
150°	0	0	0																									
160°	0	0	0																									
170°	1	1	0																									
180°	1	1	1																									

