

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEDB87903L-LS

効 率	F 	19 %
	F 	81 %
	F 	100 %
	器具 光束	750 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.5 H
B-B	1.3 H

前 面	
反射面	

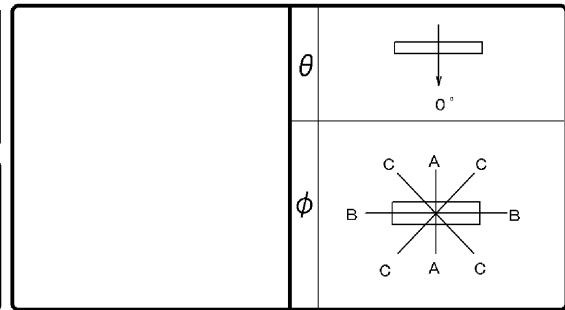

備 考	
--------	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	193	193	193
10°	193	190	192
20°	193	183	188
30°	190	171	182
40°	181	153	171
50°	166	131	156
60°	147	105	136
70°	123	75	111
80°	97	45	85
90°	76	24	63
100°	69	21	55
110°	60	16	46
120°	50	12	35
130°	39	7	24
140°	27	2	14
150°	16	1	5
160°	4	1	1
170°	1	1	1
180°	1	1	1

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																					
0.60		55	50	40	38	31	30	52	48	39	37	30	29	35	34	28	28	26	26	21	18		
0.80		66	60	51	48	41	39	62	57	49	46	40	38	45	43	37	36	34	34	28	25		
1.00		73	65	58	54	48	45	69	62	55	52	46	44	51	48	43	41	40	39	33	30		
1.25		80	71	66	60	56	52	76	68	63	58	54	51	57	54	49	47	46	44	39	35		
1.50		85	75	72	65	61	57	80	72	68	63	59	55	62	58	54	52	50	48	43	39		
2.00		94	81	81	73	72	65	88	78	77	70	69	63	70	65	63	59	58	55	50	45		
2.50		99	85	87	77	78	71	93	81	83	74	75	68	75	69	68	64	62	60	54	50		
3.00		102	88	92	81	84	75	96	84	87	78	80	72	79	72	73	68	66	63	58	53		
4.00		107	91	99	86	92	80	101	88	94	83	87	78	84	77	79	73	71	68	63	58		
5.00		110	93	103	88	97	84	104	90	97	85	92	81	87	79	83	76	75	71	66	61		
10.00		117	98	113	95	109	92	110	95	107	92	103	89	95	86	92	84	83	78	74	69		

