

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEDB87903N-LS

効 率	F 	19 %
	F 	81 %
	F 	100 %
	器具 光束	820 lm

保守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.5 H
B-B	1.3 H

前 面	
反射面	

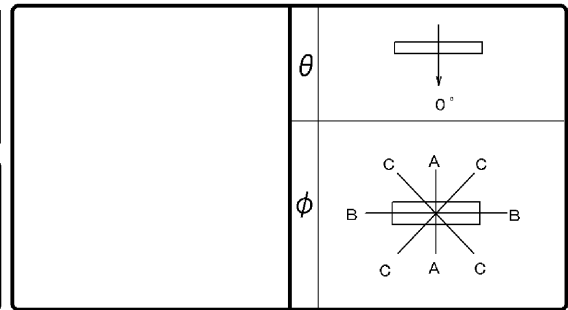

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30		20	0			
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50		30		10	0	
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
						固 有 照 明 率 (×0.01)																								
0°	192	191	191	室指数	0.60	55	51	40	38	31	30	52	48	39	37	30	29	35	34	28	28	26	26	21	18					
10°	192	189	191		0.80	66	60	51	48	41	39	62	57	49	46	40	38	45	42	37	36	34	34	28	25					
20°	192	183	188		1.00	73	65	58	54	48	45	69	62	55	52	46	44	51	48	43	41	40	39	33	30					
30°	188	170	182		1.25	80	71	66	60	56	52	76	68	63	58	53	51	57	54	49	47	46	44	39	35					
40°	179	153	171		1.50	85	75	72	65	61	57	80	72	68	63	59	55	62	58	54	52	50	48	43	39					
50°	165	131	156		2.00	94	82	81	73	72	65	88	78	77	70	69	63	70	65	63	59	58	55	50	45					
60°	146	106	136		2.50	99	85	87	77	78	71	93	82	83	74	75	68	75	69	68	64	62	60	54	50					
70°	122	76	113		3.00	102	88	92	81	84	75	96	84	87	78	80	72	79	72	73	68	66	63	58	53					
80°	96	46	86		4.00	107	91	99	86	92	81	101	88	94	83	87	78	84	77	79	73	71	68	63	58					
90°	75	25	64		5.00	110	93	103	89	97	84	104	90	98	85	92	81	87	80	83	76	75	71	66	61					
100°	68	21	56		10.00	117	98	113	95	109	93	110	95	107	92	103	90	95	86	92	84	83	78	74	69					
110°	60	17	46																											
120°	50	12	36																											
130°	39	7	24																											
140°	27	2	14																											
150°	15	0	6																											
160°	4	0	1																											
170°	1	1	1																											
180°	1	1	1																											

