


■ 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF7L-HGX/C 7/D7/2
光束	700 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

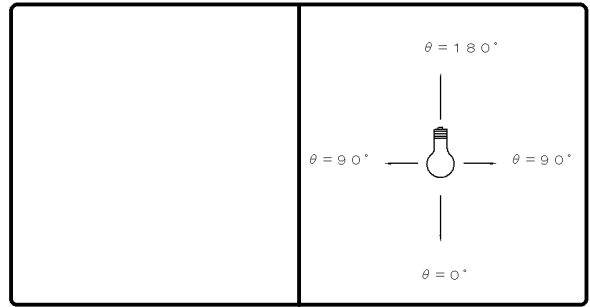

効率	F		%
	F		%
	F	100	%
	器具光束	700	lm

最大取付間隔	
A-A	1.23 H
B-B	1.23 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	377		
10°	369		
20°	346		
30°	307		
40°	255		
50°	196		
60°	138		
70°	85		
80°	41		
90°	15		
100°	11		
110°	10		
120°	9		
130°	8		
140°	6		
150°	5		
160°	4		
170°	2		
180°	2		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数		照明率 (×0.01)																					
0.60		66	61	52	49	43	41	64	59	50	48	42	41	48	47	41	40	40	39	35	33		
0.80		79	71	64	60	55	53	76	70	63	59	54	52	60	57	52	51	51	50	45	43		
1.00		86	77	72	67	62	59	83	75	70	65	61	58	67	63	59	57	57	56	51	48		
1.25		94	83	80	74	71	66	90	81	78	72	69	65	74	70	67	64	64	62	57	55		
1.50		99	87	86	78	77	71	95	85	84	77	75	70	79	74	72	69	69	67	62	60		
2.00		107	93	96	86	88	80	103	91	93	84	85	79	88	82	81	77	78	75	70	68		
2.50		112	97	102	90	94	85	108	95	99	89	92	84	93	86	87	81	83	79	75	72		
3.00		116	99	107	94	100	89	111	97	103	92	97	88	97	89	91	85	86	83	79	76		
4.00		120	102	113	98	107	94	115	100	109	96	104	93	102	93	97	90	92	87	84	81		
5.00		123	104	117	100	112	97	118	102	113	99	108	96	105	95	101	93	95	90	87	84		
10.00		129	108	126	106	122	104	124	106	121	104	118	102	112	101	109	99	102	96	94	91		

