

東芝照明器具配光データシート


名 称	LED照明器具
形 名	LEDB87004N-LS

効 率	F 	19 %
	F 	81 %
	F 	100 %
	器具 光束	1050 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

最大取付間隔	
A-A	1.4 H
B-B	1.2 H

前 面	
反射面	

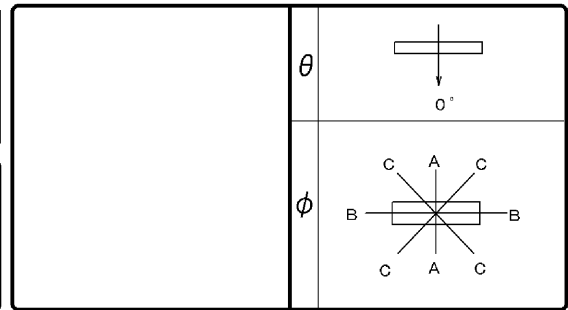

備 考	
--------	--

光度 (cd/1000lm)				反 射 率 (%)	天 井 壁 床	80						70						50						30			20	0						
$\theta \backslash \phi$	A-A	B-B	C-C			70			50			30			70			50			30			50			30			30			10	0
						30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
						固 有 照 明 率 (×0.01)																												
0°	207	209	209	室指数	0.60	55	51	41	39	32	31	53	49	39	37	31	30	36	35	29	28	27	27	22	19									
10°	207	205	207		0.80	66	60	51	48	42	40	63	58	49	47	40	39	45	43	38	37	35	34	29	26									
20°	204	193	200		1.00	73	66	59	54	49	46	69	63	56	52	47	45	51	49	44	42	40	39	34	30									
30°	196	174	188		1.25	81	72	66	61	56	53	76	69	63	59	54	51	58	54	50	48	46	45	39	35									
40°	185	150	171		1.50	86	76	72	65	62	58	81	72	69	63	60	56	62	58	55	52	51	49	43	39									
50°	171	120	152		2.00	94	82	82	73	72	66	88	78	78	70	69	64	70	65	63	60	58	56	50	46									
60°	155	88	130		2.50	99	85	88	77	79	71	93	82	83	75	75	69	75	69	69	64	63	60	55	50									
70°	138	53	109		3.00	103	88	93	81	84	75	96	84	88	78	80	73	79	73	73	68	66	64	58	53									
80°	120	20	88		4.00	107	91	99	86	92	81	101	88	94	83	87	78	84	77	79	73	72	68	63	58									
90°	101	1	70		5.00	110	93	103	89	97	84	104	90	98	86	92	81	87	80	83	76	75	71	66	61									
100°	84	0	55		10.00	117	98	113	95	109	92	110	95	107	92	103	90	95	86	92	84	83	78	74	69									
110°	68	0	43																															
120°	53	0	33																															
130°	40	1	24																															
140°	28	1	17																															
150°	19	1	12																															
160°	11	1	6																															
170°	4	1	2																															
180°	1	1	1																															

