

東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG-15850N (S)

保守率	良	0.78
	中	0.76
	否	0.72



--	--

光源	名称	LED
	形名	—
	光束	11000 lm × 1

効率	F	0.8 %
	F	99.2 %
	F	100 %
	器具光束	11000 lm

備考	
----	--

前面	カバー (透明)
反射面	

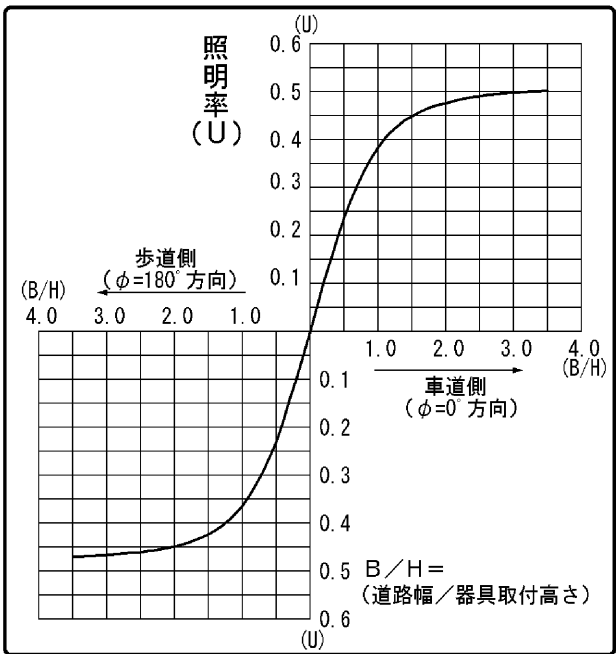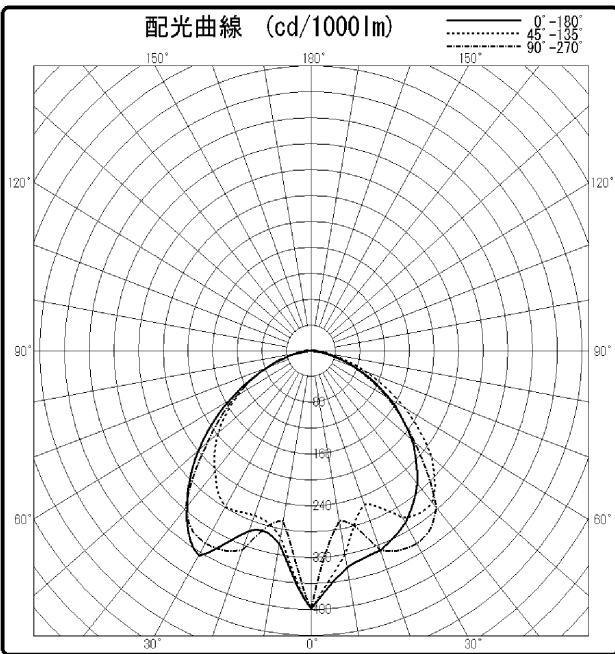

光度 (cd/1000lm)		0°	45°	90°	135°	180°
0°	θ	398	398	398	398	398
10°	θ	340	319	267	292	303
20°	θ	328	253	327	271	296
30°	θ	306	297	344	279	365
40°	θ	268	306	316	243	313
50°	θ	213	255	220	196	238
60°	θ	146	174	142	137	153
70°	θ	79	93	75	76	75
80°	θ	22	31	23	24	20
90°	θ	2	2	1	2	3
100°	θ	2	2	2	2	3
110°	θ	3	2	2	2	3
120°	θ	2	2	2	2	3
130°	θ	0	0	0	0	0
140°	θ	0	0	0	0	0
150°	θ	0	0	0	0	0
160°	θ	0	0	0	0	0
170°	θ	0	0	0	0	0
180°	θ	0	0	0	0	0

