

東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG-11854L (K)

保守率	良	0.78
	中	0.76
	否	0.72



--	--

光源	名称	LED
	形名	—
	光束	8300 lm × 1

効率	F	0.1 %
	F	99.9 %
	F	100 %
	器具光束	8300 lm

備考	
----	--

前面	ガラス (クリアー)
反射面	

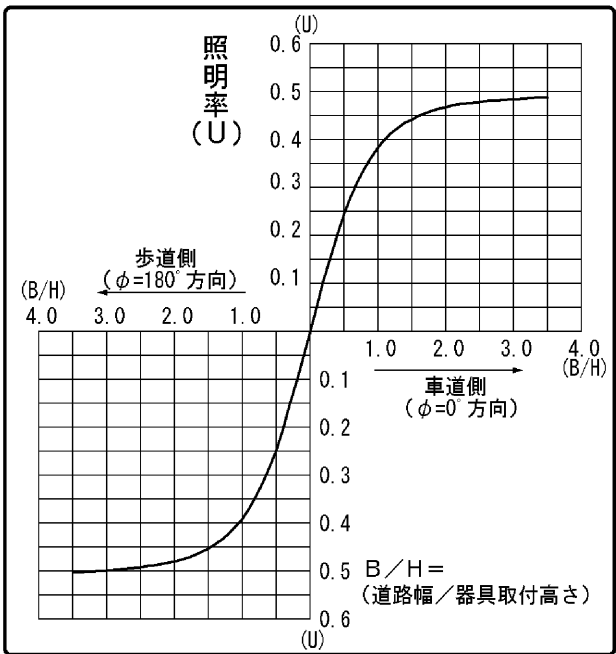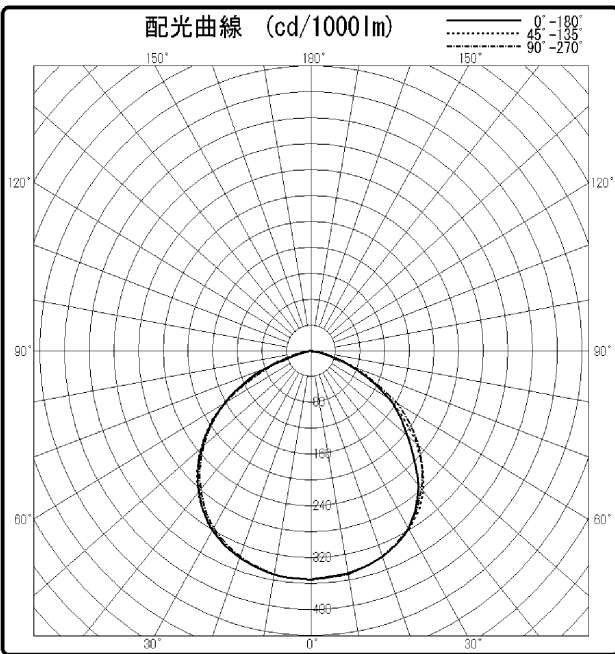

光度 (cd/1000lm)		0°	45°	90°	135°	180°
0°	0°	353	353	353	353	353
10°	0°	349	350	351	351	351
20°	0°	339	339	338	340	340
30°	0°	317	318	316	319	320
40°	0°	271	284	279	285	284
50°	0°	204	224	228	233	232
60°	0°	145	146	160	165	162
70°	0°	67	75	71	77	79
80°	0°	13	11	9	12	3
90°	0°	1	1	1	1	1
100°	0°	0	0	0	0	0
110°	0°	0	0	0	0	0
120°	0°	0	0	0	0	0
130°	0°	0	0	0	0	0
140°	0°	0	0	0	0	0
150°	0°	0	0	0	0	0
160°	0°	0	0	0	0	0
170°	0°	0	0	0	0	0
180°	0°	0	0	0	0	0

