

東芝照明器具配光データシート

| | |
|----|-----------------|
| 名称 | LED照明器具 |
| 形名 | LEDG-11854L (S) |



| | | |
|-----|---|------|
| 保守率 | 良 | 0.78 |
| | 中 | 0.76 |
| | 否 | 0.72 |

| | | |
|----|----|-------------|
| 光源 | 名称 | LED |
| | 形名 | — |
| | 光束 | 8300 lm × 1 |

| | | |
|----|-----------------|---------|
| 効率 | F $\frac{1}{2}$ | 0.1 % |
| | F $\frac{3}{4}$ | 99.9 % |
| | F \circ | 100 % |
| | 器具光束 | 8300 lm |

| | |
|-----|------------|
| 前面 | ガラス (クリアー) |
| 反射面 | |

| | |
|----|--|
| 備考 | |
|----|--|

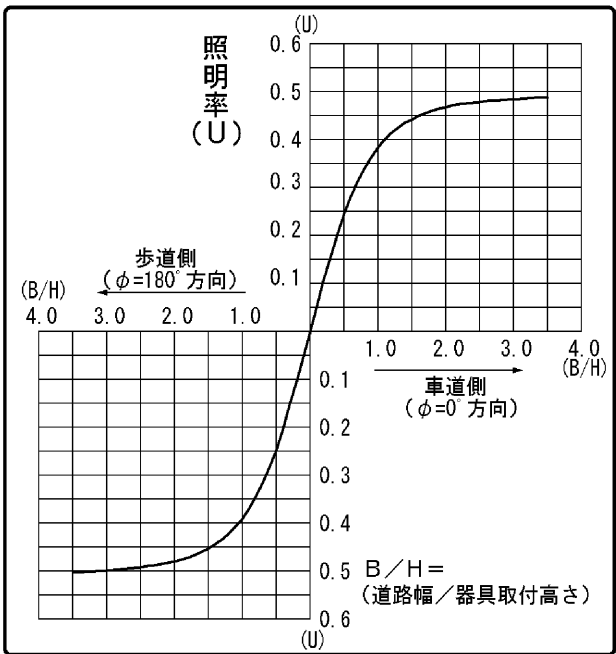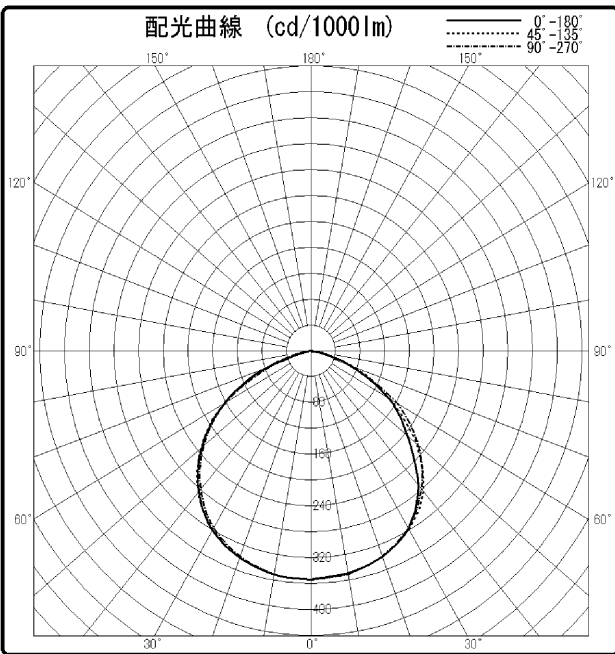

| | | 光度 (cd/1000lm) | | | | |
|--------------------------|-----|----------------|-----|------|------|--|
| $\theta \backslash \phi$ | 0° | 45° | 90° | 135° | 180° | |
| 0° | 353 | 353 | 353 | 353 | 353 | |
| 10° | 349 | 350 | 351 | 351 | 351 | |
| 20° | 339 | 339 | 338 | 340 | 340 | |
| 30° | 317 | 318 | 316 | 319 | 320 | |
| 40° | 271 | 284 | 279 | 285 | 284 | |
| 50° | 204 | 224 | 228 | 233 | 232 | |
| 60° | 145 | 146 | 160 | 165 | 162 | |
| 70° | 67 | 75 | 71 | 77 | 79 | |
| 80° | 13 | 11 | 9 | 12 | 3 | |
| 90° | 1 | 1 | 1 | 1 | 1 | |
| 100° | 0 | 0 | 0 | 0 | 0 | |
| 110° | 0 | 0 | 0 | 0 | 0 | |
| 120° | 0 | 0 | 0 | 0 | 0 | |
| 130° | 0 | 0 | 0 | 0 | 0 | |
| 140° | 0 | 0 | 0 | 0 | 0 | |
| 150° | 0 | 0 | 0 | 0 | 0 | |
| 160° | 0 | 0 | 0 | 0 | 0 | |
| 170° | 0 | 0 | 0 | 0 | 0 | |
| 180° | 0 | 0 | 0 | 0 | 0 | |

